

PRODUCT SPECIFICATIONS

Product	DW-86L578S
Cabinet Type	Upright
Climate Class	N
Storage Capacity(L/Cu.Ft)	578/20.4
Temperature Range(°C)	-40--86
Noise Level (dB(A))	53
Net/Gross Weight(kg/lbs)	325/355
Exterior Dimensions(W*D*H)	895*998*1980(mm) 35.2*39.3*78.0(in)
Interior Dimensions(W*D*H)	620*716*1310(mm) 24.4*28.2*51.6(in)
Refrigerant	HC
Cooling Performance(°C)	-86
Display	LED
Power Supply(V/Hz)	208-230/50
Power(W)	1400
Power Consumption(kwh/day)	12
Electrical Current(A)	10
Building Supply Rating (A)	16
Power Lead Length(m)	2.5
Heat Rejection (BTU/day)	40947
Ambient Temperature(°C)	10-32
Cooling Type	Direct cooling
Compressor Type/Brand/Number	Hermetic Reciprocating Type / Nidec/ 2
Compressor Capacity(W)	1300+1300
Evaporator Type	Copper Tube Evaporator
Defrost Mode	Manual
Controller Level	Top
Power Switch	16A
Controller	Microprocessor
Setpoint Security	Yes
Controller Sensor	PT100
Remote Alarm Terminals	Remote Alarm Port, RS485 (Optional)
Adjustable High/Low Temp Alarms	Y
Insulation	VIP+CFC Free Foaming Agent
Exterior Door Seal	Four Seal On The Outside Door Seal Strip
Interior Door Seal	One Seal On The Interior Door Seal Strip
Shelves/Capacity/Dims/Material	3 stainless steel adjustable shelves with dimension 602*706 mm(W*D), max capacity per shelf:40kg / 88.2lbs
Caster	Y/4
Exterior Material	Colour Coating Steel Plate
Interior Material	Colour Coating Steel Plate
Door Thickness (mm)	90
Cabinet Thickness(mm)	90
Inner Door	Four Solid Door
Condenser Type	Fin Condenser
Fan Brand	EBM
Back Up Battery for Alarm Functions	Support high/low temperature, power failure, door open, sensor failure, high ambient temperature, hot condenser and low battery alarms
Temperature Uniformity(°C)	±5
Temperature Accuracy(°C)	1
Cool Down Time (25°C ambient to -80°C) mins	180
Warm Up Time (25°C ambient -80°C to -50°C) mins	280
1 Min Door Open Recovery Time (ambient 25°C running temp -80°C)mins	30
Certificate	CE

Haier Biomedical

Intelligent Protection of Life Science

DualCool ULT Freezer

Safer by Design



DW-86L578S



Maximum Sample Security

DualCool means Stay Cool. In the event of one compressor failure the second compressor ensures the cabinet continues to maintain -80°C, therefore not jeopardising sample integrity.



Maximum Energy Efficiency

Due to cabinet design and the use of hydrocarbon refrigerants, the DualCool 578S has an outstanding energy consumption figure of 12kWh/day



Fast Cabinet Pull Down

Takes only 3 hours to cool from +25°C ambient to -80°C and provides excellent recovery times after door openings.

Haier Biomedical's ultra low temperature freezers with intelligent DualCool technology offer users the highest level of protection for valuable samples; if one compressor fails, the second compressor is designed to maintain the cabinet temperature at -80°C, ensuring sample



Haier Medical and Laboratory Products Co., Ltd

Brand Building, Haier Industrial Park, No. 1
Haier Road, Qingdao, 266101, P.R.China
Tel: +86-0532-88936011 / 5955
Website: www.haiermedical.com

Safer by Design

Haier Biomedical's ultra low temperature freezers with intelligent DualCool technology are designed to provide optimal cabinet reliability, longevity, efficiency and sample protection. This super efficient technology also improves the energy efficiency of our third generation ULT freezers and leads the way in terms of product innovation.



Reduced running costs

VIP thermal insulation designed to significantly reduce heat loss and reduce cabinet running costs.



World-leading Energy Saving Refrigeration Technology

The hydrocarbon refrigeration technology saves energy by 50%, significantly reducing the running costs of the freezer. Hydrocarbon refrigerant contains no fluorine or chlorine and has a global warming potential (GWP) value of just 3, meaning this refrigerant is a more environmentally friendly option compared to HFC refrigerants.

Intelligent DualCool Refrigeration System

Two independent refrigeration systems designed to ensure optimal reliability, longevity and efficiency. Depending on the load demands and ambient conditions, one or both refrigeration systems will operate on demand, ensuring the samples are fully protected under the worst possible condition.



PRODUCT ADVANTAGES



Energy Saving Refrigeration

High efficiency cooling fans and compressors, combined with hydrocarbon refrigerants, ensure energy savings and long-term sample security.



Pressure Equalisation Port

Heated port with spring assisted mechanism to prevent icing on the vent allows users to reopen the main door soon after entering.



USB Interface

Enables users to download historical temperature data for compliance/auditing purposes.



Multilayered Sealing Structure

Triple layer of gaskets split between main and inner doors decreases heat loss and guarantee's excellent warm up times in the event of a power failure.



Improved Handle Design

Lockable handle with unique key prevents other Haier freezer owners access to your precious samples, also comes with space for a padlock for that extra security.




Multilevel Alarms


Alarming functions that include hi and low temperature, sensor error, power failure, high ambient, clean filter and door ajar.

DW-86L578S

TYPICAL PERFORMANCE CHARACTERISTICS IN 25°C AMBIENT

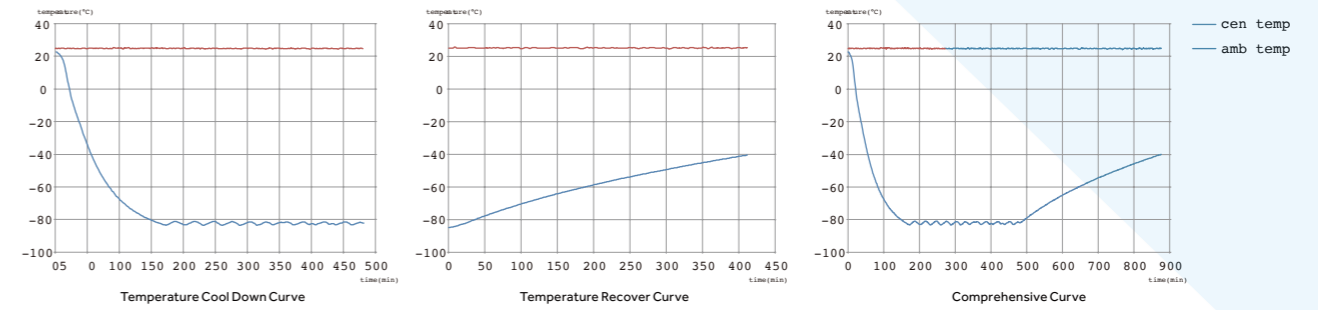

PRODUCT DIMENSION DRAWING

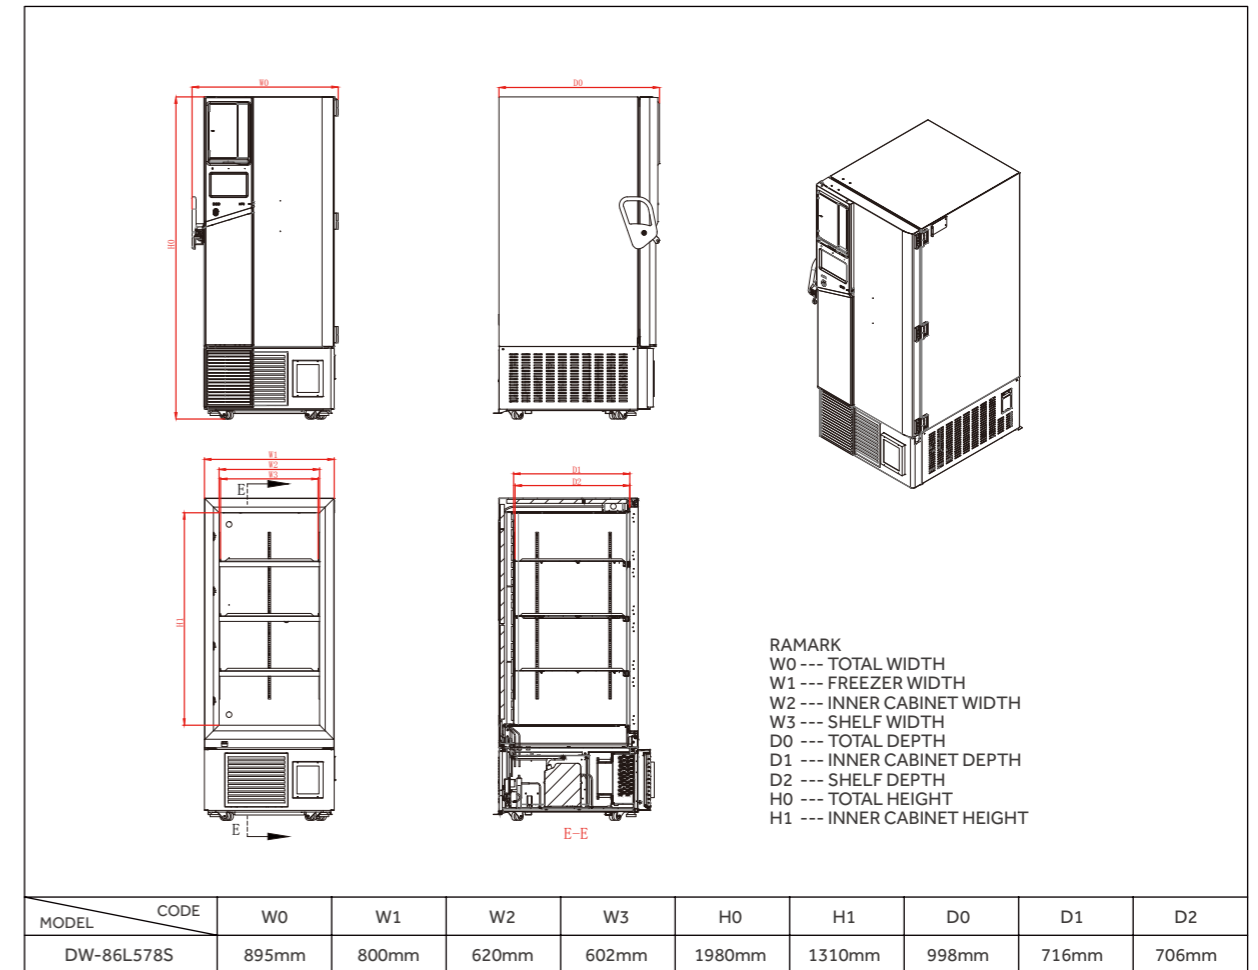

Model	Voltage (V/Hz)	Rated Power (W)	Inner Cabinet Temperature (°C)	External Dimension (W * D * H mm)	Internal Dimension (W * D * H mm)	Effective Volume (L)	Net Weight / Gross Weight (Kg)	Shelf
DW-86L578S	208~230/50	1400	-86	895*998*1980	620*716*1310	578	325/355	3