

# Data sheet

## Laboratory Incubator CLN 115



The photo above is for reference only, may show additional options not included in standard equipment.  
The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

### TECHNICAL DATA

air convection	natural
chamber capacity [l] /1/	112
working capacity [l]	112
controller	microprocessor with external LCD graphic display

### TEMPERATURE

temperature range [°C]	+5°C above ambient temperature ... +100°C
temperature resolution every ... [°C]	0,1
over temperature protection	class 2.0 to DIN 12880 / class 3.1 (option) / class 3.1 in TOP+

### CHAMBER

door type	double / door with viewing window (option)
-----------	--

### interior

STD	acid-proof stainless steel to DIN 1.4301
INOX/G	acid-proof stainless steel to DIN 1.4301

### housing


STD	powder coated sheet
INOX/G	stainless steel linen finish

**overall dims [mm] /2/**

width A	650
height B	850
depth C	700

**internal dims [mm]**

width D	460
height E	540
depth F	450

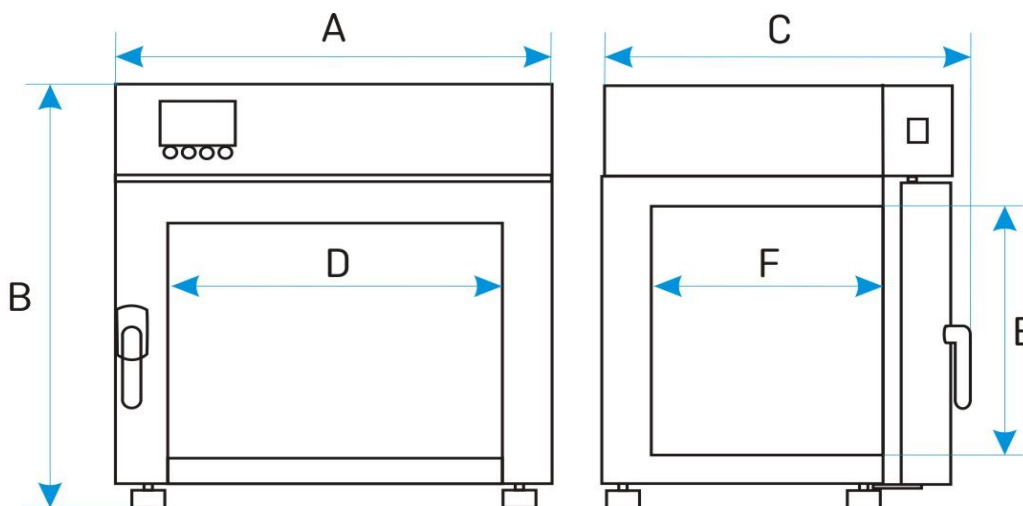

shelves (standard / max)	2 / 7
max shelf workload [kg] /5/	25
- reinforced shelf version (PW) /3/	50
max unit workload [kg]	60
- reinforced unit version (W) /4/	120
weight [kg]	65

**ELECTRICAL PARAMETERS**

voltage*	230V 50Hz
nominal power [W]	400
warranty	24 months
manufacturer	POL-EKO-APARATURA

all the above technical data refer to standard units (without optional accessories)

- \* - 230V 60Hz, 115V 60Hz also available
- 1 - working capacity of chamber can be smaller
- 2 - depth doesn't include 50 mm of power cable
- 3 - reinforced shelf
- 4 - reinforced version
- 5 - on uniformly loaded surface

**OPTIONS AND ACCESSORIES**

