


# TOPAIR SYSTEMS

## Full Catalog



**TOPAIR**  
CLEAN AIR SOLUTIONS

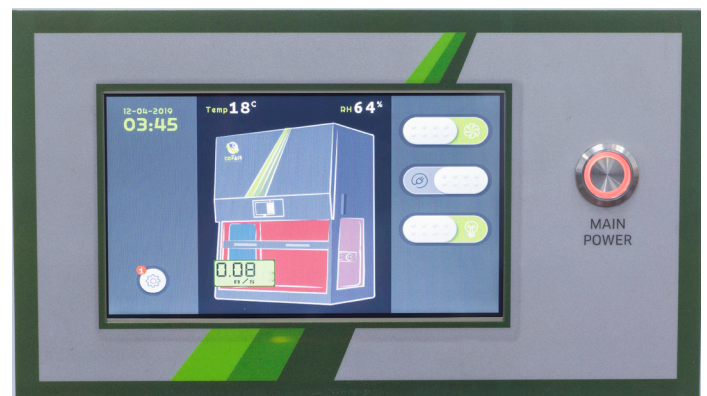

**2019 VER A**

# Table of Contents

Ductless Fume Hood - Basic.....	4
Ductless Fume Hood - MID.....	6
Ductless Fume Hood - PRO.....	8
Educational Ductless Fume Hood.....	10
Educational Ductless Fume Hood - Inverted.....	12
Weighing Station.....	14
Ecoline Ductless Fume Hood.....	16
Metal Fume Hood.....	18
Polypropylene Fume Hood.....	20
Active Polypropylene Fume Hood.....	22
Polypropylene Walk-In Fume Hood.....	24
Polypropylene Fume Hood - Wet Scrubber.....	26
Polypropylene Laminar Airflow Fume Hood.....	28
Educational Polypropylene Fume Hood with 360° Transparency.....	30
Educational Polypropylene Fume Hood with 360° Transparency.....	32
Add-On Accessories.....	34
Worktops.....	35
Filters.....	36
Technical Ceramic Worktop.....	38
Polypropylene Vertical Laminar Clean Bench.....	40
Polypropylene Horizontal Laminar Clean Bench.....	42
Metal Vertical Laminar Clean Bench.....	44
Metal Horizontal Laminar Clean Bench.....	46
IVF Laminar Clean Bench.....	48
Polypropylene PCR-UV Cabinet.....	50
Polypropylene PCR-HEPA Cabinet.....	52
Polypropylene Biosafety Cabinet Class II A2.....	54
Metal-Free Polypropylene Biosafety Cabinet Class II A2.....	56
Polypropylene Biosafety Cabinet Class II B2.....	58
Ecoline Biosafety Cabinet Class II A2.....	60
Polypropylene Lab Storage Cabinet.....	62
VAV - Auto Air Velocity Control System.....	64
Outdoor Centrifugal Fans.....	66
Washing Station.....	68
Aluminum Cyanoacrylate Fuming Chamber.....	70
Polypropylene Cyanoacrylate Fuming Chamber.....	72
Water Filtration Cyanoacrylate Fuming Chamber.....	74
Forensic Evidence Drying Hood.....	76
Downflow Unit.....	78

**Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304**

**Email: [sales@topairsystems.com](mailto:sales@topairsystems.com) Web: [www.topairsystems.com](http://www.topairsystems.com)**

**Mailing Address:** TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

**Headquarters - USA:** 8912 68th Avenue Forest Hills New York 11375 USA

**European Sales Office:** Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Photos in the catalog are for illustrative purposes only.

All Rights Reserved © TopAir Systems 2019

# About TopAir Systems



TopAir Systems is a manufacturer and provider of superior clean air and containment solutions. TopAir's clean air solutions are used in laboratories and manufacturing facilities within chemical/biological plants, universities, research & development facilities and hospitals, as well as in the electronics, semiconductor and pharmaceutical industries. The company has a worldwide customer base, with active sales in Europe, North & South America and Africa.


At TopAir Systems customer satisfaction comes first: The company exercises a flexible approach, customizing products in accordance with customer requests regarding dimensions, technical specifications and accessories. Moreover, TopAir Systems offers a variety of products and models to accommodate and cover customer needs. Finally, the company develops cost-effective solutions of the highest quality, to ensure customer satisfaction.

Product safety is a top priority: The most stringent guidelines are implemented to ensure the wellbeing of lab and manufacturing personnel, and the products comply with the relevant international certifications.

**All products can be ordered with PPS OR ESD protection.**

TopAir is strongly committed to innovation, continuously reviewing new technologies as they emerge and investing significant resources in R&D in order to provide customers with the most advanced features in the market.

## Biosafety Cabinet

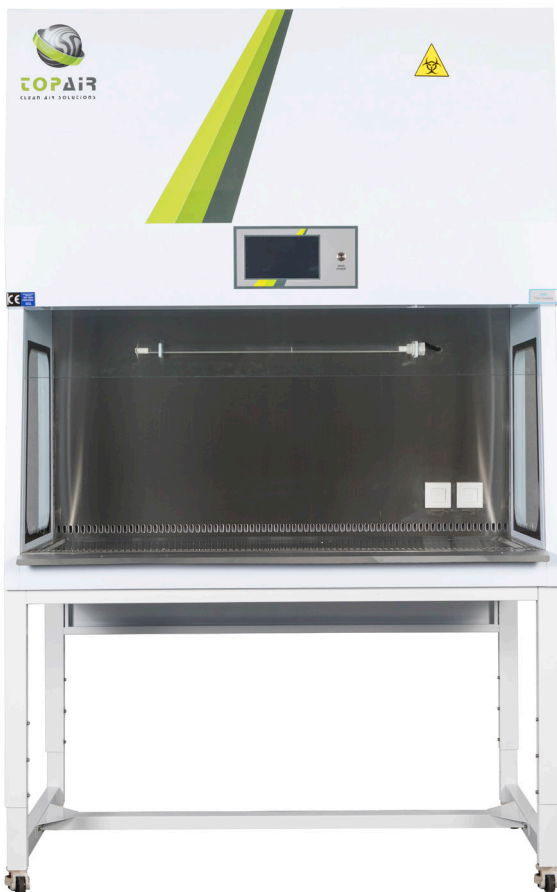

## New Ductless Pro Fume Hood



### Optional Features

PPS V2



ESD Protected



# Ductless Fume Hood - Basic



Topair's Ductless Fume Hood - Basic provides a safe work environment for lab staff working with acids and harsh chemicals.

The hood's electrical and mechanical components are manufactured by leading global companies, such as AAF USA. The products are **EN-14175 / CE / ASHRAE 110-1995 certified.**

## Advanced Operation System

- Color 5" touch screen
- 10-speed fan
- Hour counter for filter
- Filter replacement alarm for HEPA/carbon filters

TopAir's Basic Ductless Fume Hoods can be customized to the requirements of each client.



- Polypropylene structure with high chemical resistance
- Built-in sealed polypropylene worktop or choice of epoxy, stainless steel, ceramic, Trespa
- Optional stand
- Tempered glass sliding front window
- High efficiency quiet EC fan
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the work area
- Wind speed at  $0.5 \pm 0.1$  m/s,  $100 \pm 20$  FPM
- Convenient front access for filter replacement
- Variety of HEPA & carbon filters
- Exhaust point for connecting a second filter or an external exhaust
- XL model with 2 internal fans is also available
- EN-14175 / CE / ASHRAE 110-1995 certified



# Models

Spec/ Model	CF-060-PP	CF-090-PP	CF-120-PP	CF-150-PP	CF-180-PP
Outer Dimensions for standard model W x D x H	600 x 750 x 1223 mm 23.62 x 29.5 x 48"	900 x 750 x 1223 mm 35.4 x 29.5 x 48"	1200 x 750 x 1223 mm 47.24 x 29.5 x 48"	1500 x 750 x 1223 mm 59 x 29.5 x 48"	1800 x 750 x 1223 mm 70.8 x 29.5 x 48"
Dimensions for XL model with 2 internal filters W x D x H	600 x 750 x 1373 mm 23.62 x 29.5 x 54"	900 x 750 x 1373 mm 35.4 x 29.5 x 54"	1200 x 750 x 1373 mm 47.24 x 29.5 x 54"	1500 x 750 x 1373 mm 59 x 29.5 x 54"	1800 x 750 x 1373 mm 70.8 x 29.5 x 54"
For XL models add -XL to P/N					

**WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS**

Workspace (W x D x H)	585 x 610 x 695 mm 23 x 24 x 27.3"	885 x 610 x 695 mm 34.8 x 24 x 27.3"	1185 x 610 x 695 mm 46.6 x 24 x 27.3"	1485 x 610 x 695 mm 58.4 x 24 x 27.3"	1785 x 610 x 695 mm 70.2 x 24 x 27.3"
Front Sash Max. Opening	570 mm / 22.4"				
Test Standard	EN-14175 / CE / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	Welded white polypropylene structure with built-in sealed polypropylene worktop				
Noise	<52dB	<52dB	<54dB	<60dB	<62dB
<b>(Tested 20 cm from the work table, 1.2m above ground)</b>					
Power Supply	110 / 220V, 50/60 Hz, Single phase				
Illumination	800 LUX, Eco-friendly LED lighting				
Filter	Carbon filters for solvents, acids, bases, formaldehyde, multi gas (blend of materials) /HEPA/ULPA				

## Accessories

Description	Model
Metal stand	CF-size-ST
Polypropylene base cabinet	CF-size-BS
UV light	CF-size-UV
Gas tap	CF-GTAP
Water tap	CF-WTAP
Polypropylene cup sink	CF-PP-SINK
Polypropylene sink 30 x 40	CF-SINK-3040
Power outlet installed	CF-SOCKET

**Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)**

**Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA**

# Ductless Fume Hood - MID with Airflow Alarm

Topair's Polypropylene Ductless Fume Hood - MID provides a safe work environment for lab staff working with acids and harsh chemicals.

The Ductless Fume Hood - MID offers all the basic functionalities, **in addition to an air velocity display and alarm.**

The electrical and mechanical components are manufactured by leading global companies, such as AAF USA. The products are **EN-14175 / CE / ASHRAE 110-1995 certified.**

## Advanced Operation System

- Air velocity display
- Color 5" touch screen
- 10-speed fan
- Hour counter for filter
- Filter replacement alarm for HEPA/carbon filters

TopAir's Polypropylene Ductless Fume Hood - MID can be customized to the requirements of each client.

- Air flow alarm and display
- Polypropylene structure with high chemical resistance
- Built-in sealed polypropylene worktop or choice of epoxy, stainless steel, ceramic, Trespa
- Optional stand
- Tempered glass sliding front window
- High efficiency quiet EC fan
- Air velocity display
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the work area
- Wind speed at  $0.5 \pm 0.1$  m/s,  $100 \pm 20$  FPM
- Convenient front access for filter replacement
- Variety of HEPA & carbon filters
- Exhaust point for connecting a second filter or an external exhaust.
- XL model with 2 internal fans is also available
- EN-14175 / CE / ASHRAE 110-1995 certified



# Models

Spec/ Model	CF-060-AFA	CF-090-AFA	CF-120-AFA	CF-150-AFA	CF-180-AFA
Outer Dimensions for standard model W x D x H	600 x 750 x 1223 mm 23.62 x 29.5 x 48"	900 x 750 x 1223 mm 35.4 x 29.5 x 48"	1200 x 750 x 1223 mm 47.24 x 29.5 x 48"	1500 x 750 x 1223 mm 59 x 29.5 x 48"	1800 x 750 x 1223 mm 70.8 x 29.5 x 48"
Dimensions for XL model with 2 internal filters W x D x H	600 x 750 x 1373 mm 23.62 x 29.5 x 54"	900 x 750 x 1373 mm 35.4 x 29.5 x 54"	1200 x 750 x 1373 mm 47.24 x 29.5 x 54"	1500 x 750 x 1373 mm 59 x 29.5 x 54"	1800 x 750 x 1373 mm 70.8 x 29.5 x 54"
For XL models add -XL to P/N					
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>					
Workspace (W x D x H)	585 x 610 x 695 mm 23 x 24 x 27.3"	885 x 610 x 695 mm 34.8 x 24 x 27.3"	1185 x 610 x 695 mm 46.6 x 24 x 27.3"	1485 x 610 x 695 mm 58.4 x 24 x 27.3"	1785 x 610 x 695 mm 70.2 x 24 x 27.3"
Front Sash Max. Opening	570 mm / 22.4"				
Test Standard	EN-14175 / CE / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	Welded white polypropylene structure with built-in sealed polypropylene worktop				
Noise	<52dB	<52dB	<54dB	<60dB	<62dB
<b>(Tested 20 cm from the work table, 1.2m above ground)</b>					
Power Supply	110 / 220V, 50/60 Hz, Single phase				
Illumination	800 LUX, Eco-friendly LED lighting				
Filter	Carbon filters for solvents, acids, bases, formaldehyde, multi gas (blend of materials) /HEPA/ULPA				

# Accessories

Description	Model
Metal stand	CF-size-ST
Polypropylene base cabinet	CF-size-BS
UV light	CF-size-UV
Gas tap	CF-GTAP
Water tap	CF-WTAP
Polypropylene cup sink	CF-PP-SINK
Polypropylene sink 30 x 40	CF-SINK-3040
Power outlet installed	CF-SOCKET

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Ductless Fume Hood-PRO



Topair's Polypropylene Ductless Fume Hood - PRO provides a safe work environment for lab staff working with acids and harsh chemicals.

The hood includes an advanced VAV (Variable Air Volume) system. The VAV system measures the product's air velocity using a high quality sensor, and adjusts the air velocity speed to the relevant standard.

Maximal energy savings are enabled by flexibly adjusting the fan speed (high/low) as needed. The system features a high safety level, displaying real time air velocity and providing alarms for low velocity levels, thus reducing the fume hood's noise level.

## Advanced Operation System

- Color 7" touch screen
- Hour counter for filter
- Filter replacement alarm for HEPA/Carbon filters
- Sensor for temperature and humidity

The products are **EN-14175 / CE / ASHRAE 110-1995 certified.**


## Chemical Sensor Alarm

Samples the chemical level after filtration, displays PPM results and alerts upon low filtration efficiency


Active Charcoal/ HEPA Filter

## Red Light Alarm

A red light inside the unit switches on whenever there is any kind of a failure (including chemicals or air velocity failures) while the system light switches off. This enables convenient detection of failures, even by people with hearing issues, and from a distance.

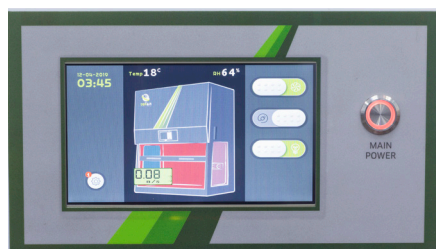

- Automatic airflow control (VAV) with 7" color touch screen, various operation speeds, configurable alarms, visual & audio alarms.
- Chemical sensor alarm
- Polypropylene structure, high chemical resistance
- Built-in sealed polypropylene worktop or choice of epoxy, stainless steel, ceramic, Trespa
- Optional stand
- High efficiency EC fan
- Tempered glass sliding front window
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the work area
- Wind speed at 0.5 m/s, 100 FPM
- Convenient front access for filter replacement
- Variety of HEPA & carbon filters
- Exhaust point for connecting a 2nd filter or an external exhaust.
- XL model with 2 internal fans is also available
- EN-14175 / CE / ASHRAE 110-1995 certified

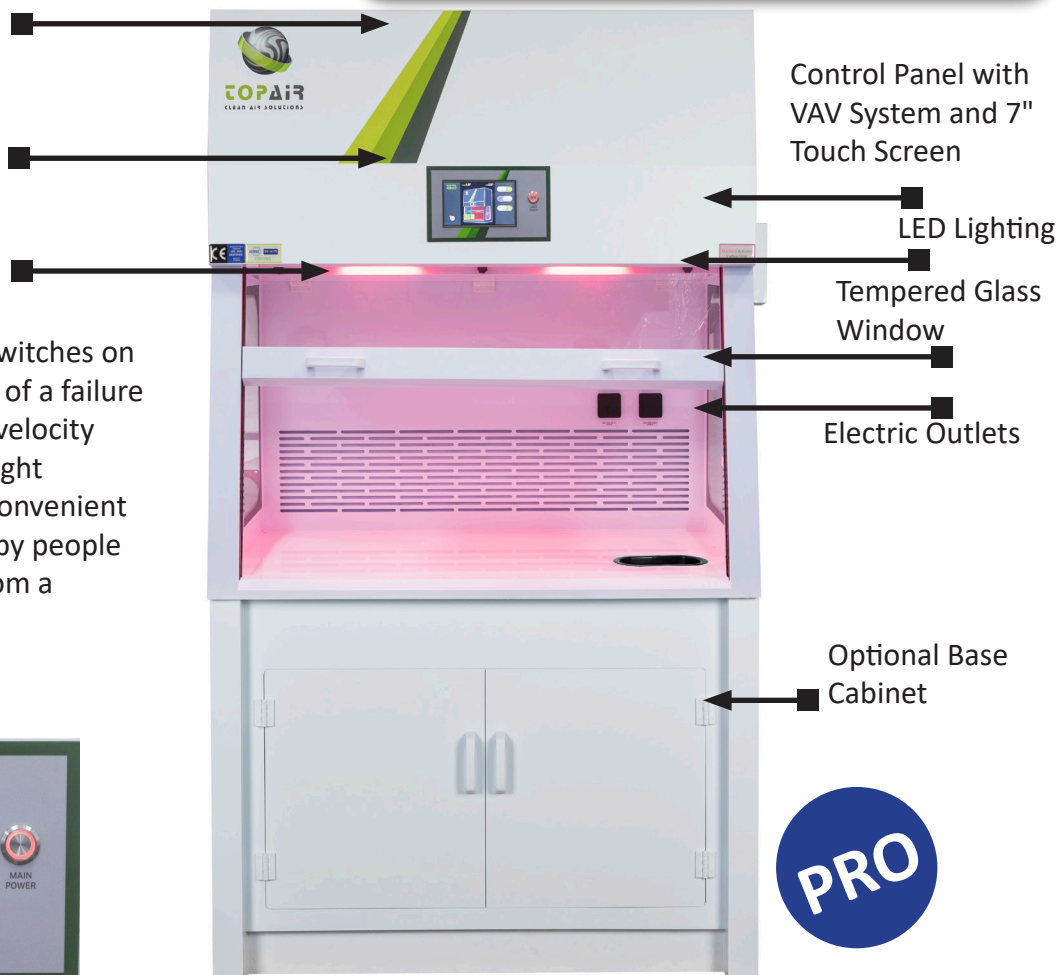

# Models

Spec/ Model	CF-060-PRO	CF-090-PRO	CF-120-PRO	CF-150-PRO	CF-180-PRO
Outer Dimensions W x D x H	600 x 750 x 1223 mm 23.62 x 29.5 x 48"	900 x 750 x 1223 mm 35.4 x 29.5 x 48"	1200 x 750 x 1223 mm 47.24 x 29.5 x 48"	1500 x 750 x 1223 mm 59 x 29.5 x 48"	1800 x 750 x 1223 mm 70.8 x 29.5 x 48"
Dimensions for XL model with 2 internal filters W x D x H For XL models add -XL to P/N	600 x 750 x 1373 mm 23.62 x 29.5 x 54"	900 x 750 x 1373 mm 35.4 x 29.5 x 54"	1200 x 750 x 1373 mm 47.24 x 29.5 x 54"	1500 x 750 x 1373 mm 59 x 29.5 x 54"	1800 x 750 x 1373 mm 70.8 x 29.5 x 54"

## WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS

Workspace (W x D x H)	585 x 610 x 695 mm 23 x 24 x 27.3"	885 x 610 x 695 mm 34.8 x 24 x 27.3"	1185 x 610 x 695 mm 46.6 x 24 x 27.3"	1485 x 610 x 695 mm 58.4 x 24 x 27.3"	1785 x 610 x 695 mm 70.2 x 24 x 27.3"
Front Sash Max. Opening	570 mm / 22.4"				
Test Standard	EN-14175 / CE / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	Welded white polypropylene structure with built-in sealed polypropylene worktop				
Noise	<52dB	<52dB	<54dB	<60dB	<62dB
<b>(Tested 20 cm from the work table, 1.2m above ground)</b>					
Power Supply	110 / 220V, 50/60 Hz, Single phase				
Illumination	800 LUX, Eco-friendly LED lighting				
Filter	Carbon filters for solvents, acids, bases, formaldehyde, multi gas (blend of materials) /HEPA/ULPA				

# Accessories

Description	Model
Metal stand	CF-size-ST
Polypropylene base cabinet	CF-size-BS
UV light	CF-size-UV
Gas tap	CF-GTAP
Water tap	CF-WTAP
Polypropylene cup sink	CF-PP-SINK
Polypropylene sink 30 x 40	CF-SINK-3040
Power outlet installed	CF-SOCKET

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Educational Ductless Fume Hood with 360° Clear Glass



Topair's Educational Ductless Fume Hood with all-around clear glass provides 360° transparency for exceptional visibility in educational sessions.

The fume hood offers a safe work environment for lab staff working with acids and harsh chemicals.

The product's electrical and mechanical components are manufactured by leading global companies, such as AAF USA. The products are **EN-14175 / CE / ASHRAE 110-1995 certified.**


### Advanced Operation System:

- Color 5" touch screen
- 10-speed fan
- Hour counter for filter
- Filter replacement alarm

TopAir's Educational Ductless Fume Hood can be customized to the requirements of each client.



- 360° transparency for exceptional visibility
- Polypropylene structure, high chemical resistance
- Built-in sealed polypropylene worktop or choice of epoxy, stainless steel, ceramic, Trespa
- Optional stand
- Tempered glass sliding front window
- High efficiency quiet EC fan
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the work area
- Wind speed at  $0.5 \pm 0.1$  m/s,  $100 \pm 20$  FPM
- Advanced operation system (see to the left)
- Convenient front access for filter replacement
- Variety of HEPA & carbon filters
- Exhaust point for connecting a second filter or an external exhaust.
- XL model with 2 internal fans is also available
- EN-14175 / CE / ASHRAE 110-1995 certified

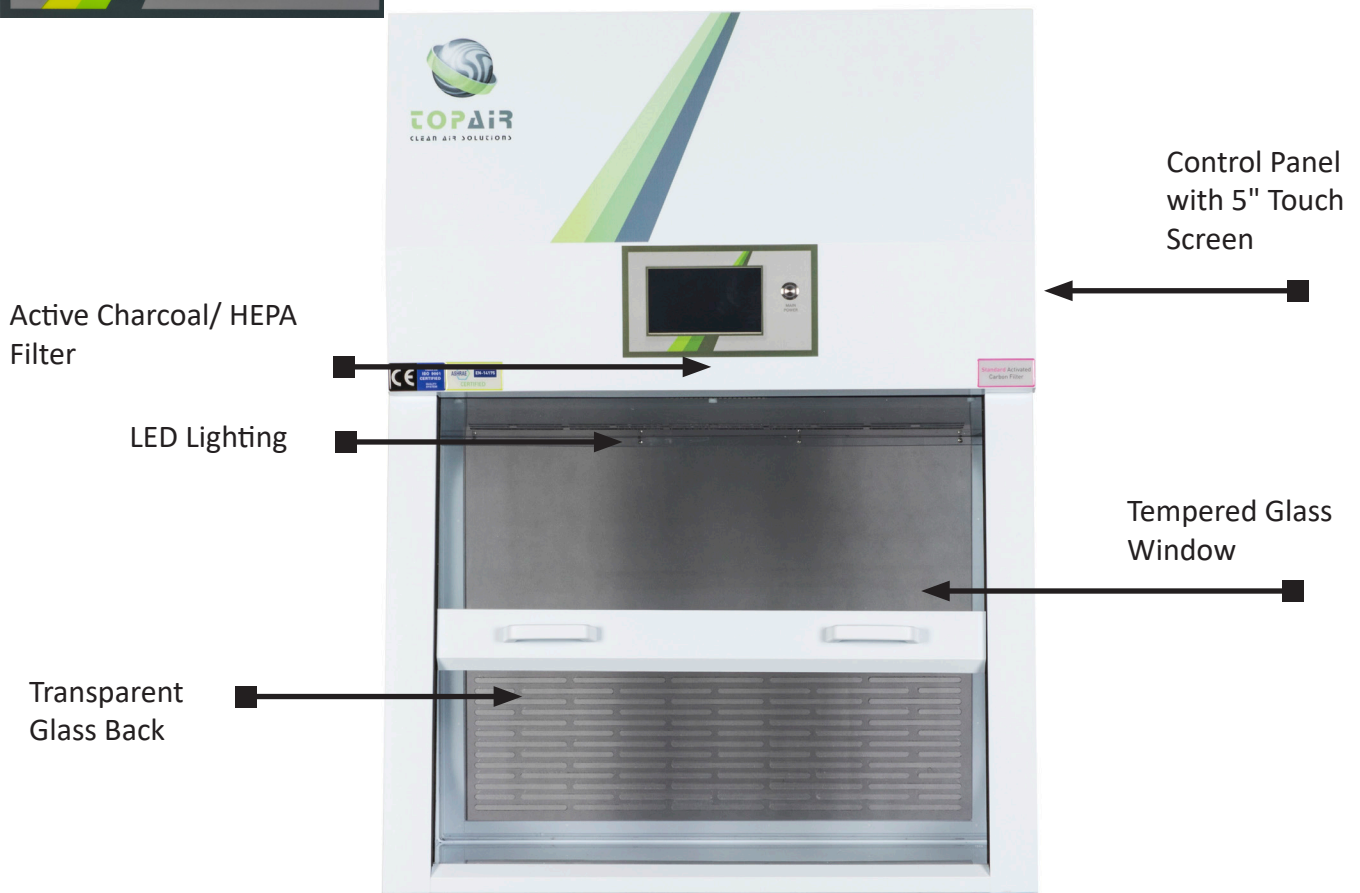

# Models

Spec/ Model	CF-060-CB	CF-090-CB	CF-120-CB	CF-150-CB	CF-180-CB
Outer dimensions for standard model W x D x H	600 x 750 x 1223 mm 23.62 x 29.5 x 48"	900 x 750 x 1223 mm 35.4 x 29.5 x 48"	1200 x 750 x 1223 mm 47.24 x 29.5 x 48"	1500 x 750 x 1223 mm 59 x 29.5 x 48"	1800 x 750 x 1223 mm 70.8 x 29.5 x 48"
Dimensions for XL model with 2 internal filters W x D x H	600 x 750 x 1373 mm 23.62 x 29.5 x 54"	900 x 750 x 1373 mm 35.4 x 29.5 x 54"	1200 x 750 x 1373 mm 47.24 x 29.5 x 54"	1500 x 750 x 1373 mm 59 x 29.5 x 54"	1800 x 750 x 1373 mm 70.8 x 29.5 x 54"
For XL models add -XL to P/N					
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>					
Workspace (W x D x H)	585 x 610 x 695 mm 23 x 24 x 27.3"	885 x 610 x 695 mm 34.8 x 24 x 27.3"	1185 x 610 x 695 mm 46.6 x 24 x 27.3"	1485 x 610 x 695 mm 58.4 x 24 x 27.3"	1785 x 610 x 695 mm 70.2 x 24 x 27.3"
Front Sash Max. Opening	570 mm / 22.4"				
Test Standard	EN-14175 / CE / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	Welded white polypropylene structure with built-in sealed polypropylene worktop				
Noise Level	<52dB	<52dB	<54dB	<60dB	<62dB
Power Supply	110 / 220V, 50/60 Hz, Single phase				
Illumination	800 LUX, Eco-friendly LED lighting				
Filter	Carbon filters for solvents, acids, bases, formaldehyde, multi gas (blend of materials) /HEPA/ULPA				

# Accessories

Description	Model
Metal stand	CF-size-ST
Polypropylene base cabinet	CF-size-BS
UV light	CF-size-UV
Gas tap	CF-GTAP
Water tap	CF-WTAP
Polypropylene cup sink	CF-PP-SINK
Polypropylene sink 30 x 40	CF-SINK-3040
Power outlet installed	CF-SOCKET

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Educational Ductless Fume Hood with 360° Glass - Inverted



Topair's Educational Ductless Fume Hood with 360° Glass - Inverted - provides an effective tool for educational purposes, a safe work environment for lab staff working with acids and harsh chemicals.

The electrical and mechanical components are manufactured by leading global companies.

The unit features an operation system with a 5" color touch screen, controlling the entire system, including:

- 10-speed fan
- Air velocity display
- Fan activation
- Light activation
- Power activation

The unit features an Airflow Alarm which displays the air velocity and alerts upon problems with the air velocity using a sound or visual alert. Additionally, a red light inside the unit switches on when there is an alert, enabling convenient remote identification of a problem, even by people with hearing issues, without their having to look closely at the screen which is usually located at a high point.

- 360° Transparent glass
- Polypropylene structure with high chemical resistance
- Built-in sealed polypropylene worktop or choice of epoxy, stainless steel, ceramic, Trespa
- Tempered glass sliding front window
- Strong, quiet and cost-effective EC Fan with high power efficiency
- Eco-friendly, cost-effective 800 LUX LED lighting
- Velocity > 0.5 m/s
- Convenient front access for filter replacement
- Educational carbon blend filter (22 Kg) and pre filter
- Complies with BS7989:2001 and CLEAPSS



Water tap

Sink



Control Panel

Tempered Glass Window

Fan filter hold

# Models

Spec/ Model	CF-100-PP-RV
Outer Dimensions W x D x H	1000 x 700 x 1850 mm, 39.4 x 27.5 x 72.8"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>	
Workspace (W x D x H)	840 X 500 X 865 mm, 33 x 19.7 x 34"
Front Sash Max.	Min. 200, Max 350 mm
Test Standard	Compliance with BS7989:2001 and CLEAPSS
Air Velocity	0.5±0.1 m/s, 100±20 FPM
Hood Material	Welded white anti-corrosion polypropylene structure with built-in sealed polypropylene worktop
Noise (Tested 20 cm from the work table, 1.2m above ground)	<52dB
Power Supply	230V, 50 Hz, Single phase
Illumination	800 LUX, Eco-friendly LED lighting
Filter	Carbon filters for solvents, acids, bases, formaldehyde, multi gas (blend of materials) /HEPA/ULPA

## Accessories

Description	Status
Polypropylene base cabinet	Included
Gas tap	Included
Water tap	Included
Polypropylene cup sink	Included
Power outlet installed	No

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Weighing Station



Topair's Weighing Station is designed for weighing powders and chemicals, and provides precise weighing data with up to 4 decimal places.


It also provides a safe work environment for lab staff working with acids and harsh chemicals.

The electrical and mechanical components are manufactured by leading global companies, such as AAF USA. The products are **EN-14175 / CE / ASHRAE 110-1995 certified.**

### Advanced Operation System:

- Color 5" touch screen
- 10-speed fan
- Hour counter for filter
- Filter replacement alarm

TopAir's weighing stations can be customized to the requirements of each client.

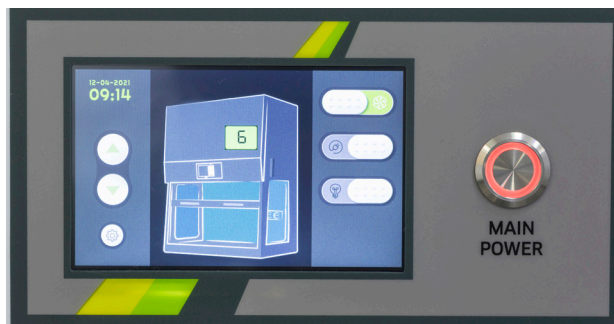

- Provides precise weighing data - up to 4 decimal places
- Polypropylene structure with high chemical resistance
- Built-in sealed polypropylene worktop or choice of epoxy, stainless steel, ceramic, Trespa
- Tempered glass sliding front window
- High efficiency, quiet EC fan
- Optional stand
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the work area
- Wind speed at  $0.5 \pm 0.1$  m/s,  $100 \pm 20$  FPM
- Convenient front access for filter replacement
- Optional: No worktop, with independent table or optical table.
- Advanced operation system
- User-friendly digital control system
- XL model with 2 internal fans is also available
- EN-14175 / CE / ASHRAE 110-1995 certified



# Models

Spec/ Model	CF-060-PP-W	CF-090-PP-W	CF-120-PP-W	CF-150-PP-W	CF-180-PP-W
Outer dimensions for standard model W x D x H	600 x 750 x 1223 mm 23.62 x 29.5 x 48"	900 x 750 x 1223 mm 35.4 x 29.5 x 48"	1200 x 750 x 1223 mm 47.24 x 29.5 x 48"	1500 x 750 x 1223 mm 59 x 29.5 x 48"	1800 x 750 x 1223 mm 70.8 x 29.5 x 48"
Dimensions for XL model with 2 internal filters W x D x H	600 x 750 x 1373 mm 23.62 x 29.5 x 54"	900 x 750 x 1373 mm 35.4 x 29.5 x 54"	1200 x 750 x 1373 mm 47.24 x 29.5 x 54"	1500 x 750 x 1373 mm 59 x 29.5 x 54"	1800 x 750 x 1373 mm 70.8 x 29.5 x 54"
For XL models add -XL to P/N					
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>					
Workspace (W x D x H)	585 x 610 x 695 mm 23 x 24 x 27.3"	885 x 610 x 695 mm 34.8 x 24 x 27.3"	1185 x 610 x 695 mm 46.6 x 24 x 27.3"	1485 x 610 x 695 mm 58.4 x 24 x 27.3"	1785 x 610 x 695 mm 70.2 x 24 x 27.3"
Front Sash Max. Opening	570 mm / 22.4"				
Test Standard	EN-14175 / CE / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	Welded white polypropylene structure with built-in sealed polypropylene worktop				
Noise	<52dB	<52dB	<54dB	<60dB	<62dB
(Tested 20 cm from the work table, 1.2m above ground)					
Power Supply	110 / 220V, 50/60 Hz, Single phase				
Illumination	800 LUX, Eco-friendly LED lighting				
Filter	Carbon filters for solvents, acids, bases, formaldehyde, multi gas (blend of materials) /HEPA/ULPA				

# Accessories

Description	Model
Metal stand	CF-size-ST
Polypropylene base cabinet	CF-size-BS
UV light	CF-size-UV
Gas tap	CF-GTAP
Water tap	CF-WTAP
Polypropylene cup sink	CF-PP-SINK
Polypropylene sink 30 x 40	CF-SINK-3040
Power outlet installed	CF-SOCKET

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA



# Ecoline Ductless Fume Hood




Topair's Ecoline Ductless Fume Hood provides a safe work environment for lab staff working with acids and harsh chemicals.

A compact, cost-effective benchtop hood, it comprises electrical and mechanical components manufactured by leading global companies.

TopAir's Ecoline Ductless Fume Hoods can be customized to the requirements of each client.

- Compact cost-effective model
- Polypropylene structure with high chemical resistance
- Built-in sealed polypropylene worktop or choice of epoxy, stainless steel, ceramic, Trespa
- Tempered glass stationary front window
- Monitor displays fan's total operation time, for tracking and filter replacement purposes
- Eco-friendly, cost-effective 800 LUX LED lighting
- Wind speed at  $0.5 \pm 0.1$  m/s,  $100 \pm 20$  FPM
- Back access for filter replacement
- Variety of HEPA & carbon filters
- Exhaust point for connecting a second filter or an external exhaust.

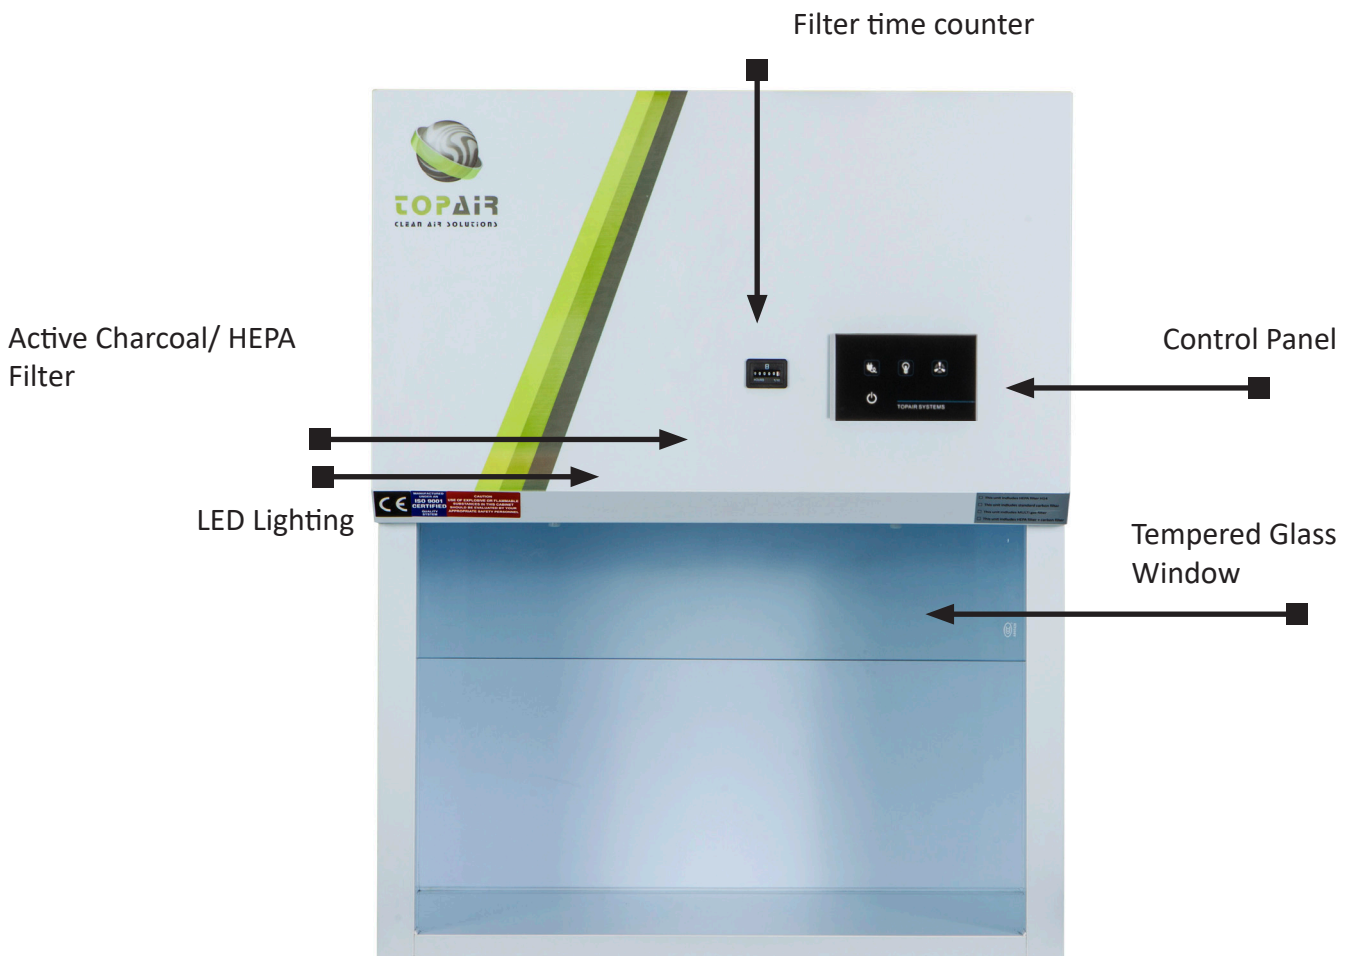

# Models

Spec/Model	ECO-CF-075	ECO-CF-090	ECO-CF-120
Outer Dimensions (W x D x H)	750 x 580 x 950 mm 29.5 x 22.8 x 37.4"	900 x 580 x 950 mm 35.4 x 22.8 x 37.4"	1200 x 580 x 950 mm 47.2 x 22.8 x 37.4"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>			
Workspace (W x D x H)	730 x 450 x 450 mm 28.7 x 17.7 x 17.7"	880 x 450 x 450 mm 34.6 x 17.7 x 17.7"	1180 x 450 x 450 mm 46.4 x 17.7 x 17.7"
Front Sash Max. Opening	300 mm / 11.8"	300 mm / 11.8"	300 mm / 11.8"
Equipment Entry Opening	450 mm / 17.7"	450 mm / 17.7"	450 mm / 17.7"
Air Velocity	0.5±0.1 m/s, 100±20 FPM	0.5±0.1 m/s, 100±20 FPM	0.5±0.1 m/s, 100±20 FPM
Hood Material	Welded white polypropylene structure with built-in sealed polypropylene worktop	Welded white polypropylene structure with built-in sealed polypropylene worktop	Welded white polypropylene structure with built-in sealed polypropylene worktop
Noise Level (Tested 20 cm from the work table, 1.2m above ground)	<52dB	<52dB	<52dB
Power Supply	110 / 220V, 50/60 Hz, Single phase	110 / 220V, 50/60 Hz, Single phase	110 / 220V, 50/60 Hz, Single phase
Illumination	800 LUX, Eco-friendly LED lighting	800 LUX, Eco-friendly LED lighting	
Filter	Carbon filters for solvents, acids, bases, formaldehyde, multi gas (blend of materials) /HEPA/ULPA	Carbon filters for solvents, acids, bases, formaldehyde, multi gas (blend of materials) /HEPA/ULPA	Carbon filters for solvents, acids, bases, formaldehyde, multi gas (blend of materials) /HEPA/ULPA

# Accessories

Spec/Model	ECO-CF-075-ST	ECO-CF-090-ST	ECO-CF-120-ST
Stand WxDxH	750 x 600 x 800 29.5 x 23.6 x 31.5"	900 x 600 x 800 mm 35 x 23.6 x 31.5"	1200 x 600 x 800 mm 47.2" x 23.6 x 31.5"

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Metal Fume Hood




Topair's Metal Fume Hoods protect laboratory staff from noxious fumes when working with acids, dangerous gas, organic solvents, etc. Harmful and unpleasant chemical fumes are removed from the controlled environment to facilitate a safe and pleasant work environment.

The fume hood channels chemical vapors out of the building using an external fan installed on the roof or on an external wall.

The hood structure is made of epoxy-covered metal, while the internal structure is made of HPL 6mm.

The hoods are **EN-14175 / CE / ASHRAE 110-1995 certified.**

- Metal epoxy-coated oven-tempered structure, with an optional polypropylene construction suitable for working with harsh chemicals
- Tempered glass sliding front sash
- Air suction from both the top and back panel
- LED lighting at 800 LUX, with optional rupture protection
- Airflow velocity of  $0.5\pm 0.1$  m/s,  $100\pm 20$  FPM
- Side walls coated with 6 mm HPL for durability and easy cleaning, option for polypropylene/stainless steel
- Epoxy work surface with edges sloping towards the workspace, with options for HPL/stainless steel/polypropylene/ceramic
- Control panel including on/off unit power and light switch, with an optional VAV system
- Includes metal lower base cabinet
- EN-14175 / CE / ASHRAE 110-1995 certified

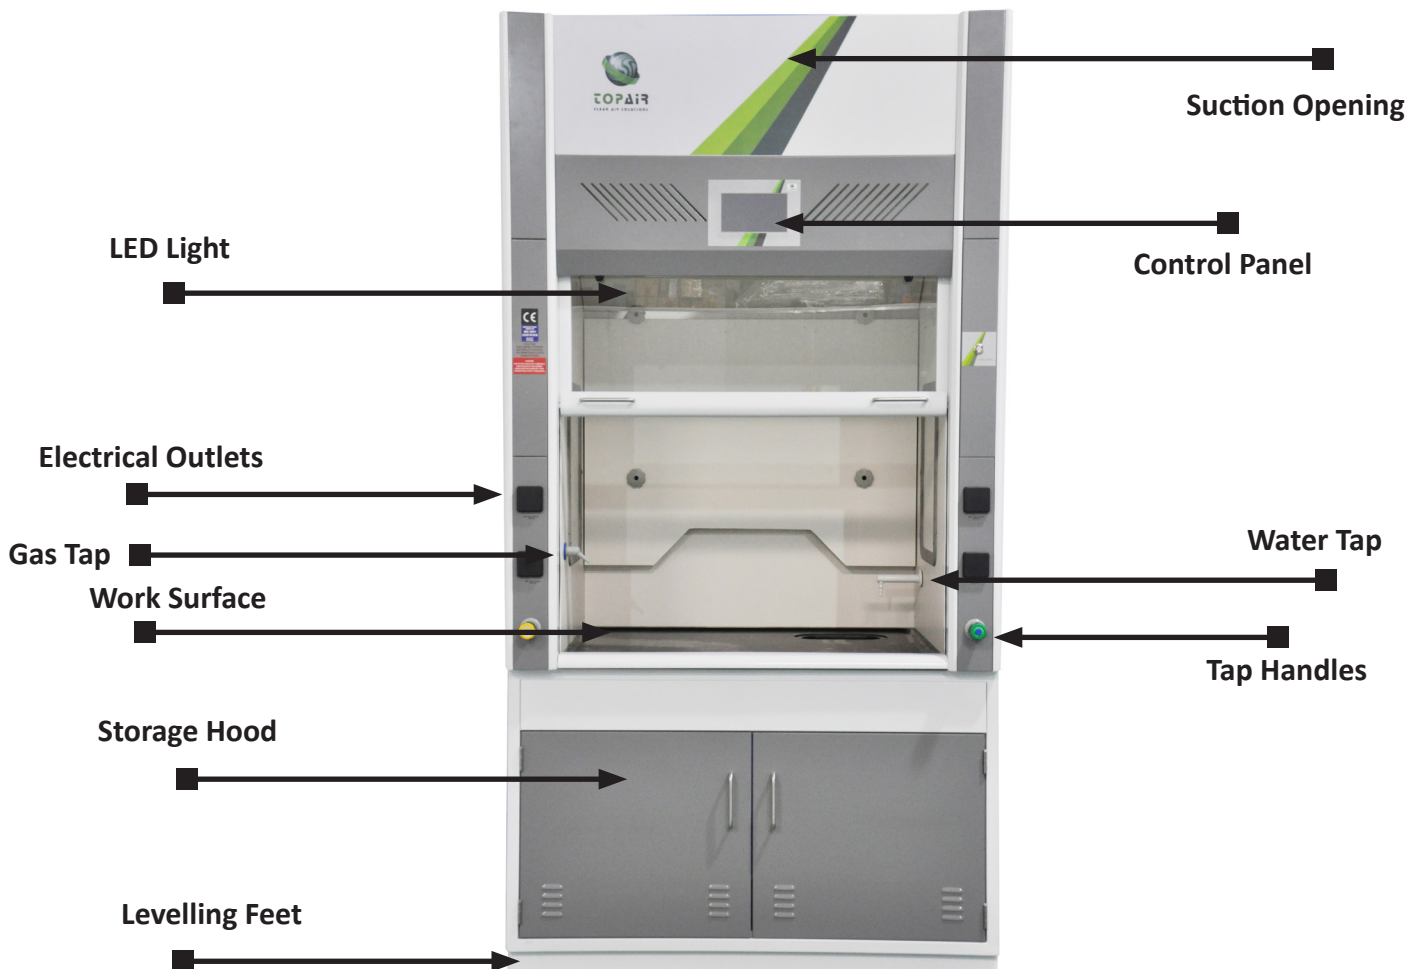

# Models

Spec/Model	FH-120	FH-150	FH-180	FH-200	FH-250
External Dimensions	1200 x 800 x 2350 mm	1500 x 800 x 2350 mm	1800 x 800 x 2350 mm	2000 x 800 x 2350 mm	2500 x 800 x 2350 mm
W x D x H	47.2 x 31.5 x 92.5"	59 x 31.5 x 92.5"	70.9 x 31.5 x 92.5"	78.7 x 31.5 x 92.5"	98.4 x 31.5 x 92.5"
Workspace	950 x 680 x 1145 mm	1250 x 680 x 1145 mm	1550 x 680 x 1145 mm	1800 x 630 x 1145 mm	2300 x 630 x 1145 mm
(W x D x H)	37.4 x 26.7 x 45"	49.2 x 26.7 x 45"	61 x 26.7 x 45"	70.8 x 26.7 x 45"	90.5 x 26.7 x 45"

**WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS**

Front Sash Max Opening	860 mm / 33.8"
Production / test Standard	EN-14175 / CE / ASHRAE 110-1995
Air Velocity	0.5±0.1 m/s, 100±20 FPM
Hood Material	Inner coating – 6 mm HPL; External - Cold rolled steel, static powder coated
Work Table	HPL/ Ceramic / Epoxy / PP / Stainless steel
Optional Control System	VAV System with 9" color touch screen
Optional	Water tap/ gas tap / vacuum tap/ pp sink / triplex glass / Ex proof light
Power Supply	110 / 220V, 50/60 Hz, Single/Triple Phase
Illumination	800 LUX

# Accessories

Description	Model
Kit for Fume Hood includes: 1 water tap, 1 gas tap, 1 cup sink and 4 power outlets	FH-KIT
Gas tap	FH-GTAP
Water tap	FH-WTAP
Polypropylene cup sink	FH-PP-SINK
Polypropylene sink 30 x 40	FH-SINK-3040
Power outlet	FH-SOCKET
Air flow monitor with audible alarm VAV+VFD installed, including 9" LCD touch screen controller	FH-VAV
Centrifugal fan 0.75 kw 2800 RPM/IE3	FH-FAN-750
Centrifugal fan 1.1 KW 2800 RPM/IE3 DIA 300 mm	FH-FAN-1100-300

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene Fume Hood




Topair's Polypropylene Fume Hoods are made of high-quality non-corrosive polypropylene with excellent chemical resistance. Polypropylene increases the product's tensile strength and improves its thermal characteristics.

The Polypropylene Fume Hoods protect laboratory staff from noxious fumes released by acids, dangerous gas and organic solutions - materials and acids which regular steel hoods may not withstand.

Harmful and unpleasant chemical fumes are removed from the controlled environment to facilitate a safe and pleasant work environment. The fume hood channels chemical vapors out of the building using an external fan installed on the roof or on an external wall.

The hoods are designed for work with heavy chemicals, have been independently tested, and **EN-14175 / CE / ASHRAE 110-1995 certified.**

- Polypropylene structure with high chemical resistance
- One-piece welded structure
- Built-in polypropylene worktop
- Tempered glass sliding front sash
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the work area
- Includes polypropylene lower base Hood
- Optional: sink/water tap/gas tap/vacuum tap
- User-friendly digital control system including fan, light and signal light control
- Control panel including on/off unit power and light switch, with an optional VAV system
- EN-14175, ASHRAE 110-1995, CE certified

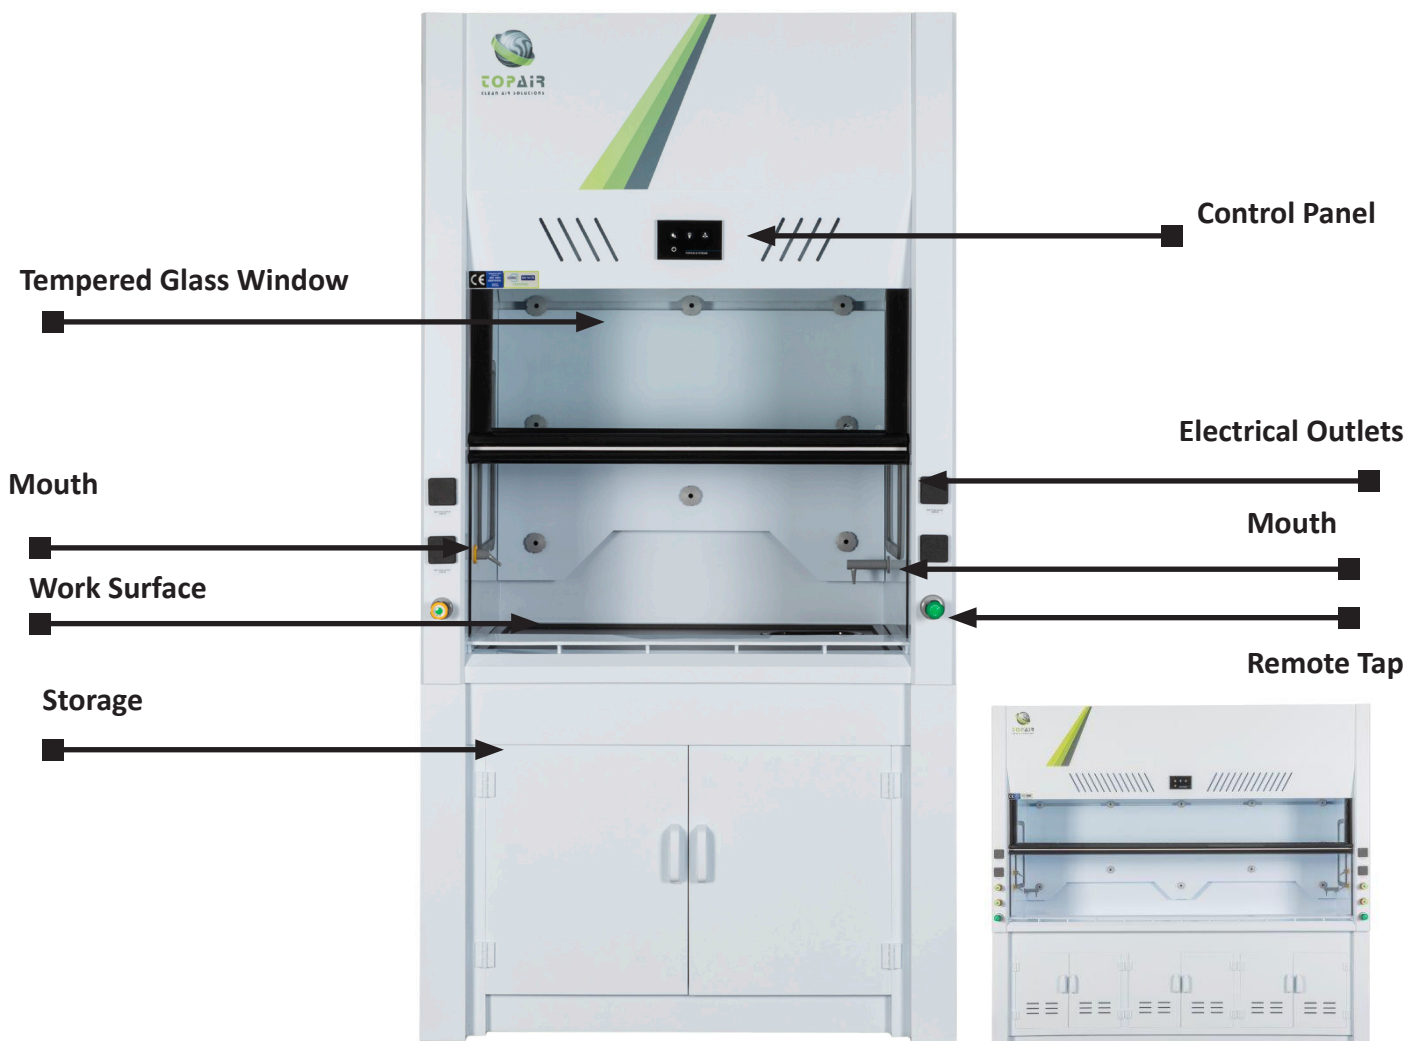

# Models

Spec/Model	FH-120-PP	FH-150-PP	FH-180-PP	FH-200-PP	FH-250-PP
External Dimensions	1200 x 850 x 2320 mm	1500 x 850 x 2320 mm	1800 x 850 x 2320 mm	2000 x 850 x 2320 mm	2500 x 850 x 2320 mm
W x D x H	47.3x 33.4 x 91.3"	59.0 x 33.4 x 91.3"	70.9 x 33.4 x 91.3"	78.7 x 33.4 x 91.3"	98.4 x 33.4 x 91.3"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>					
Workspace	1000 x 650 x 1170 mm	1300 x 650 x 1170 mm	1600 x 650 x 1170 mm	1800 x 650 x 1170 mm	2300 x 650 x 1170 mm
(W x D x H)	39.4 x 25.6 x 46"	51.2 x 25.6 x 46"	63 x 25.6 x 46"	70.8 x 25.6 x 46"	90.5 x 25.6 x 46"
Front Sash Max Opening	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"
Production / test Standard	EN-14175 / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	White Polypropylene				
Work Table Material	HPL/ Ceramic / Epoxy / PP / Stainless steel				
Optional Control System	VAV System with 9" color touch screen				
Optional	Water tap/ gas tap / vacuum tap/ pp sink				
Power Supply	110 / 220V, 50/60 Hz, Single/triple phase				
Illumination	800 LUX LED lights				

# Accessories

Description	Model
Kit for Fume Hood includes: 1 water tap, 1 gas tap, 1 cup sink and 4 power outlets	FH-KIT
Gas tap	FH-GTAP
Water tap	FH-WTAP
Polypropylene cup sink	FH-PP-SINK
Polypropylene sink 30 x 40	FH-SINK-3040
Power outlet	FH-SOCKET
Air flow monitor with audible alarm VAV+VFD installed, including 9" LCD touch screen controller	FH-VAV
Centrifugal fan 0.75 kw 2800 RPM/IE3	FH-FAN-750
Centrifugal fan 1.1 KW 2800 RPM/IE3 DIA 300 mm	FH-FAN-1100-300

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Active Polypropylene Fume Hood



TopAir's Active Polypropylene Fume Hood is an advanced high quality system enhanced with innovative technology, offered at highly competitive prices.

The hood is made of high-quality non-corrosive polypropylene with excellent chemical resistance.

The Active Fume Hoods protect laboratory staff from noxious fumes released by acids, dangerous gas and organic solutions – materials and acids which regular steel hoods may not withstand. Harmful and unpleasant chemical fumes are removed from the controlled environment to facilitate a safe and pleasant work environment. The fume hood channels chemical vapors out of the building using an external fan installed on the roof or on an external wall.

The fume hood features a sensor which detects staff standing next to the unit, and accordingly, opens and closes the window automatically. The unit's fan speed changes according to the open/closed mode of the window, saving substantial energy.


Upon a failure, the interior of the cabinet is lighted up in bright red, so that staff, including people with hearing issues, can easily detect the failure from a distance.

## VAV System

TopAir's reliable VAV (Variable Air Volume) system for fume hoods measures the air velocity using a high quality sensor. The data is converted to an analog signal that can control a VFD (Variable-Frequency Drive).

The system's key advantage is its ease of operation: an unskilled worker can easily calibrate, set the alarm and operation set points and control the system. The VAV system provides a safe energy-saving environment and can upgrade fume hoods to smart, advanced devices. TopAir's VAV system is provided as a complete installed product.

- VAV system including 9" color display screen
- Sensor detects staff presence and opens/closes the window, as well as adjusting fan speed to save energy
- Polypropylene structure with high chemical resistance
- One-piece welded structure
- Built-in polypropylene worktop
- Tempered glass sliding front sash
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the work area
- Optional: sink/water tap/gas tap/vacuum tap
- Includes polypropylene lower base Hood
- Optional: Variety of worktop materials
- EN-14175 / ASHRAE 110-1995 / CE certified

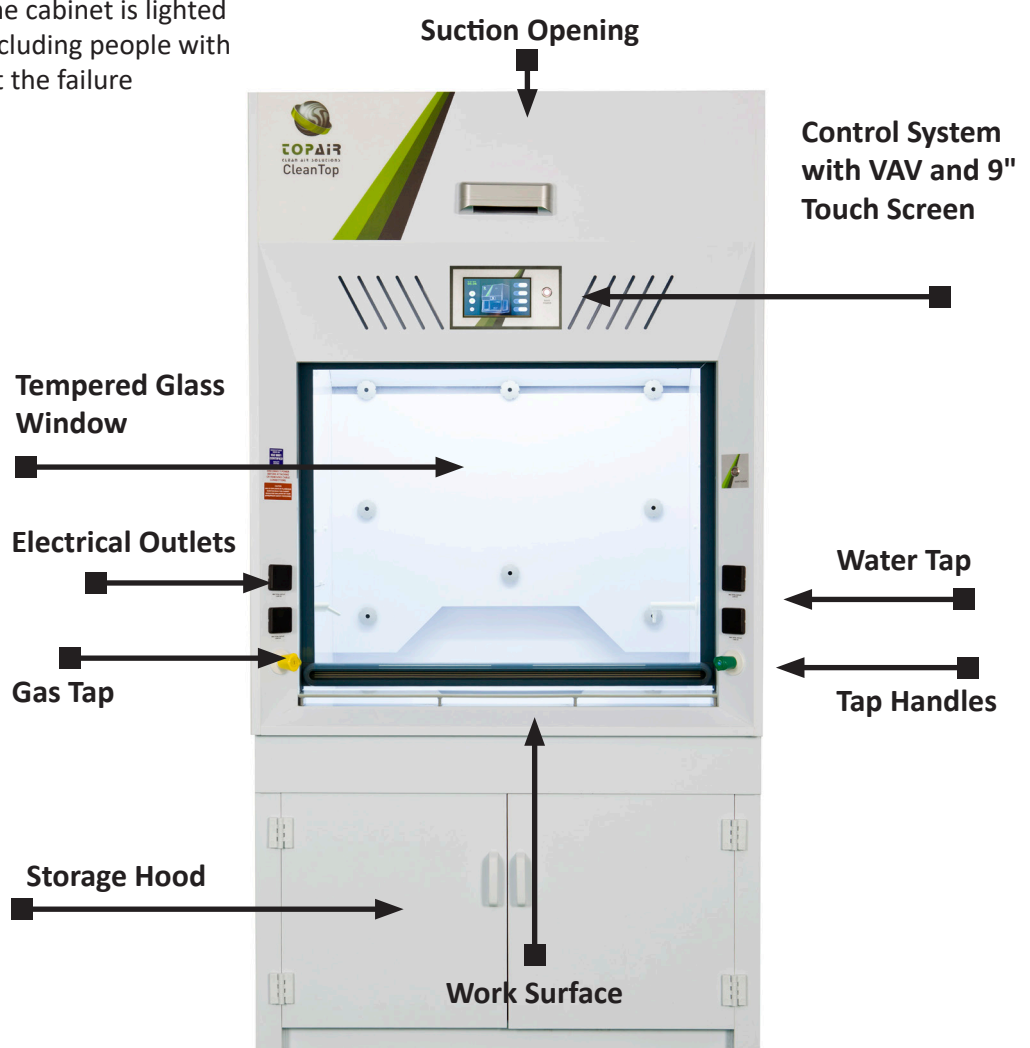

# Models

Spec/Model	FH-120-PP-ACT	FH-150-PP-ACT	FH-180-PP-ACT	FH-200-PP-ACT	FH-250-PP-ACT
External Dimensions	1200 x 850 x 2320 mm	1500 x 850 x 2320 mm	1800 x 850 x 2320 mm	2000 x 850 x 2320 mm	2500 x 850 x 2320 mm
W x D x H	47.3x 33.4 x 91.3"	59.0 x 33.4 x 91.3"	70.9 x 33.4 x 91.3"	78.7 x 33.4 x 91.3"	98.4 x 33.4 x 91.3"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>					
Workspace	1000 x 650 x 1170 mm	1300 x 650 x 1170 mm	1600 x 650 x 1170 mm	1800 x 650 x 1170 mm	2300 x 650 x 1170 mm
(W x D x H)	39.4 x 25.6 x 46"	51.2 x 25.6 x 46"	63 x 25.6 x 46"	70.8 x 25.6 x 46"	90.5 x 25.6 x 46"
Front Sash Max Opening	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"
Production / test Standard	EN-14175 / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	White Polypropylene				
Work Table Material	HPL/ Ceramic / Epoxy / PP / Stainless steel				
Control System	VAV System with 9" color touch screen				
Optional	Water tap/ gas tap / vacuum tap/ pp sink				
Power Supply	110 / 220V, 50/60 Hz, Single/triple phase				
Illumination	800 LUX LED lights				

# Accessories

Description	Model
Kit for Fume Hood includes: 1 water tap, 1 gas tap, 1 cup sink and 4 power outlets	FH-KIT
Gas tap	FH-GTAP
Water tap	FH-WTAP
Polypropylene cup sink	FH-PP-SINK
Polypropylene sink 30 x 40	FH-SINK-3040
Power outlet	FH-SOCKET
Air flow monitor with audible alarm VAV+VFD installed, including 9" LCD touch screen controller	FH-VAV
Centrifugal fan 0.75 kw 2800 RPM/IE3	FH-FAN-750
Centrifugal fan 1.1 KW 2800 RPM/IE3 DIA 300 mm	FH-FAN-1100-300

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene Walk-In Fume Hood



Topair's Walk-In Fume Hood offers a large front opening designed to contain large, heavy, or tall equipment.

It protects laboratory staff from noxious fumes released by acids, dangerous gas and organic solvents– materials and acids which regular steel hoods may not withstand.

The hood is made of high-quality non-corrosive polypropylene with excellent chemical resistance. Polypropylene increases the product's tensile strength and improves its thermal characteristics.

Harmful and unpleasant chemical fumes are removed from the controlled environment to facilitate a safe and pleasant work environment. The fume hood channels chemical vapors out of the building using an external fan installed on the roof or on an external wall.

The hoods are designed for work with heavy chemicals, have been independently tested, and **EN-14175 / CE / ASHRAE 110-1995 certified.**

- Large front opening that can contain large, heavy or tall objects
- Polypropylene structure with high chemical resistance
- Large front window - 1.80mm high
- One-piece welded structure
- Tempered glass sliding front sash
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the work area
- Optional: sink/water tap/gas tap/vacuum tap
- User-friendly digital control system
- Control panel including on/off unit power and light switch, with an optional VAV system
- EN-14175 / CE / ASHRAE 110-1995 certified.



# Models

Spec/Model	FH-120-WI-PP	FH-150-WI-PP	FH-180-WI-PP	FH-200-WI-PP	FH-250-WI-PP
External Dimensions	1200 x 950 x 2320 mm	1500 x 950 x 2320 mm	1800 x 950 x 2320 mm	2000 x 950 x 2320 mm	2500 x 950 x 2320 mm
W x D x H	47.3x 37.4 x 91.3"	59.0 x 37.4 x 91.3"	70.9 x 37.4 x 91.3"	78.7 x 37.4 x 91.3"	98.4 x 37.4 x 91.3"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>					
Workspace	1000 x 650 x 2000 mm	1300 x 650 x 2000 mm	1600 x 650 x 2000 mm	1800 x 650 x 2000 mm	2300 x 650 x 2000 mm
(W x D x H)	39.4 x 25.6 x 78.7"	51.2 x 25.6 x 78.7"	63 x 25.6 x 78.7"	70.8 x 25.6 x 78.7"	90.5 x 25.6 x 78.7"
Front Sash Max Opening	1800 mm / 70.8"	1800 mm / 70.8"	1800 mm / 70.8"	1800 mm / 70.8"	1800 mm / 70.8"
Production / test Standard	CE				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	White Polypropylene				
Work Table Material	HPL/ Ceramic / Epoxy / PP / Stainless steel				
Optional Control System	VAV System with 9" color touch screen				
Optional	Water tap/ gas tap / vacuum tap/ pp sink				
Power Supply	110 / 220V, 50/60 Hz, Single/triple phase				
Illumination	800 LUX LED lights				

# Accessories

Description	Model
Kit for Fume Hood includes: 1 water tap, 1 gas tap, 1 cup sink and 4 power outlets	FH-KIT
Gas tap	FH-GTAP
Water tap	FH-WTAP
Polypropylene cup sink	FH-PP-SINK
Polypropylene sink 30 x 40	FH-SINK-3040
Power outlet	FH-SOCKET
Air flow monitor with audible alarm VAV+VFD installed, including 9" LCD touch screen controller	FH-VAV
Centrifugal fan 0.75 kw 2800 RPM/IE3	FH-FAN-750
Centrifugal fan 1.1 KW 2800 RPM/IE3 DIA 300 mm	FH-FAN-1100-300

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene Fume Hood - Wet Scrubber



**NEW!**

TopAir's Polypropylene Fume Hood - Wet Scrubber features a quality scrubbing media which collects mist and chemicals and channels them down to the water tank. Its upper eliminator prevents mist from reaching the exhaust fan.

The fume hood is used to filter out acids and prevent them from being released into the environment. The scrubber is built-in as an integrated part of the hood.



The Polypropylene fume hoods are made of high-quality non-corrosive polypropylene with excellent chemical resistance.

The fume hoods protect laboratory staff from noxious fumes released by acids, dangerous gas and organic solvents- materials and acids which regular steel hoods may not withstand.

The hoods are designed for work with heavy chemicals, have been independently tested, and **EN-14175 / CE / ASHRAE 110-1995 certified.**

## Wet scrubber functionality comprises:

- Spray Nozzles
- Upper Eliminator
- Scrubbing Media
- Water Pump
- Water Tank
- Visual + Audio Alarm for low water level
- Wide surface for extended reach
- Low noise system
- Low pressure drop
- Compact size
- Easy access for maintenance and repairs
- Control panel including on/off unit power and light switch, with an optional VAV system
- EN-14175, ASHRAE 110-1995, CE certified

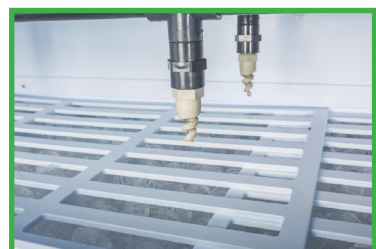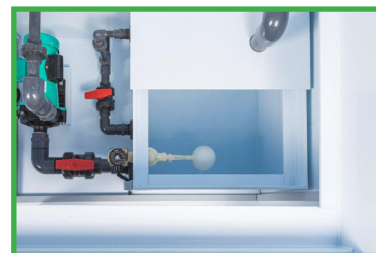

# Models

Spec/Model	FH-120-WS	FH-150-WS	FH-180-WS	FH-200-WS	FH-250-WS
External Dimensions	1200 x 980 x 2370 mm	1500 x 980 x 2370 mm	1800 x 980 x 2370 mm	2000 x 980 x 2370 mm	2500 x 980 x 2370 mm
W x D x H	47.3x 38.6 x 93.3"	59.0 x 38.6 x 93.3"	70.9 x 38.6 x 93.3"	78.7 x 38.6 x 93.3"	98.4 x 38.6 x 93.3"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>					
Workspace (W x D x H)	1000 x 630 x 1000 mm 39.4 x 24.8 x 39.4"	1300 x 630 x 1000 mm 51.2 x 24.8 x 39.4"	1600 x 630 x 1000 mm 63 x 24.8 x 39.4"	1800 x 630 x 1000 mm 70.8 x 24.8 x 39.4"	2300 x 630 x 1000 mm 90.5 x 24.8 x 39.4"
Front Sash Max Opening	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"
Production / test Standard	EN-14175 / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	White Polypropylene				
Work Table Material	HPL/ Ceramic / Epoxy / PP / Stainless steel				
Optional Control System	VAV System with 9" color touch screen				
Optional	Water tap/ gas tap / vacuum tap/ pp sink				
Power Supply	110 / 220V, 50/60 Hz, Single/triple phase				
Illumination	800 LUX LED lights				

# Accessories

Description	Model
Kit for Fume Hood includes: 1 water tap, 1 gas tap, 1 cup sink and 4 power outlets	FH-KIT
Gas tap	FH-GTAP
Water tap	FH-WTAP
Polypropylene cup sink	FH-PP-SINK
Polypropylene sink 30 x 40	FH-SINK-3040
Power outlet	FH-SOCKET
Air flow monitor with audible alarm VAV+VFD installed, including 9" LCD touch screen controller	FH-VAV
Centrifugal fan 0.75 kw 2800 RPM/IE3	FH-FAN-750
Centrifugal fan 1.1 KW 2800 RPM/IE3 DIA 300 mm	FH-FAN-1100-300

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene Laminar Airflow Fume Hood



**NEW!**

TopAir's Laminar Airflow Fume Hoods offer clean bench functionality. They are made of high-quality non-corrosive polypropylene with excellent chemical resistance. Polypropylene increases the product's tensile strength and improves its thermal characteristics.

The fume hoods protect laboratory staff from noxious fumes released by acids, dangerous gas and organic solutions - materials and acids which regular steel hoods may not withstand.

Harmful and unpleasant chemical fumes are removed from the controlled environment to facilitate a safe and pleasant work environment. The fume hood channels chemical vapors out of the building using an external fan installed on the roof or on an external wall, and then channels the filtered air back into the workspace.

The hoods are designed for work with heavy chemicals, have been independently tested, and **EN-14175 / CE / ASHRAE 110-1995 certified.**

- Clean bench functionality
- Polypropylene structure with high chemical resistance
- One-piece welded structure
- Built-in polypropylene worktop
- Tempered glass sliding front sash
- Cleanliness level - Class 100/ISO 5
- Eco-friendly, cost-effective 800 LUX LED lighting separated from the work area
- Includes polypropylene lower base Hood
- Optional: sink/water tap/gas tap/vacuum tap
- User-friendly digital control system
- Control panel including on/off unit power and light switch, with an optional VAV system
- EN-14175, ASHRAE 110-1995, CE certified



# Models

Spec/Model	FH-120-HCV	FH-150-HCV	FH-180-HCV	FH-200-HCV	FH-250-HCV
External Dimensions	1200 x 805x 2320 mm	1500 x 805 x 2320 mm	1800 x 805 x 2320 mm	2000 x 805 x 2320 mm	2500 x 805 x 2320 mm
W x D x H	47.3 x 31.7 x 91.3"	59.0 x 31.7 x 91.3"	70.9 x 31.7 x 91.3"	78.7 x 31.7 x 91.3"	98.4 x 31.7 x 91.3"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>					
Workspace	1000 x 630 x 1170 mm	1300 x 630 x 1170 mm	1600 x 630 x 1170 mm	1800 x 630 x 1170 mm	2300 x 630 x 1170 mm
(W x D x H)	39.4 x 24.8 x 46"	51.2 x 24.8 x 46"	63 x 24.8 x 46"	70.8 x 24.8 x 46"	90.5 x 24.8 x 46"
Front Sash Max Opening	720 mm / 28.3"				
Test Standard	EN-14175 / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	White Polypropylene				
Cleanliness Level	Class 100/ISO 5				
Work Table	HPL/ Ceramic / Epoxy / PP / Stainless steel				
Optional Control System	VAV System with 9" color touch screen				
Optional	Water tap/ gas tap / vacuum tap/ pp sink				
Power Supply	110 / 220V, 50/60 Hz, Single/triple phase				
Illumination	800 LUX LED lights				

# Accessories

Description	Model
Kit for Fume Hood includes: 1 water tap, 1 gas tap, 1 cup sink and 4 power outlets	FH-KIT
Gas tap	FH-GTAP
Water tap	FH-WTAP
Polypropylene cup sink	FH-PP-SINK
Polypropylene sink 30 x 40	FH-SINK-3040
Power outlet	FH-SOCKET
Air flow monitor with audible alarm VAV+VFD installed, including 9" LCD touch screen controller	FH-VAV
Centrifugal fan 0.75 kw 2800 RPM/IE3	FH-FAN-750
Centrifugal fan 1.1 KW 2800 RPM/IE3 DIA 300 mm	FH-FAN-1100-300

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Educational Polypropylene Fume Hood with 360° Transparency



**NEW!**

Topair's Educational Fume Hood has transparent sides and a transparent back for 360° visibility, serving educational purposes.


The hoods are made of high-quality non-corrosive polypropylene with excellent chemical resistance. Polypropylene increases the product's tensile strength and improves its thermal characteristics.

The fume hoods protect laboratory staff from noxious fumes released by acids, dangerous gas and organic solutions - materials and acids which regular steel hoods may not withstand.

Harmful and unpleasant chemical fumes are removed from the controlled environment to facilitate a safe and pleasant work environment. The fume hood channels chemical vapors out of the building using an external fan installed on the roof or on an external wall.

The hoods are designed for work with heavy chemicals, have been independently tested, and **EN-14175 / CE / ASHRAE 110-1995 certified**.

- 360° transparency for educational purposes
- Polypropylene structure with high chemical resistance
- One-piece welded structure
- Built-in polypropylene worktop
- Tempered glass sliding front sash
- Eco-friendly 800 LUX LED lighting separated from the work area
- Includes polypropylene lower base cabinet
- Optional: sink/water tap/gas tap/vacuum tap
- User-friendly digital control system
- Control panel including on/off unit power and light switch, with an optional VAV system
- EN-14175, ASHRAE 110-1995, CE certified

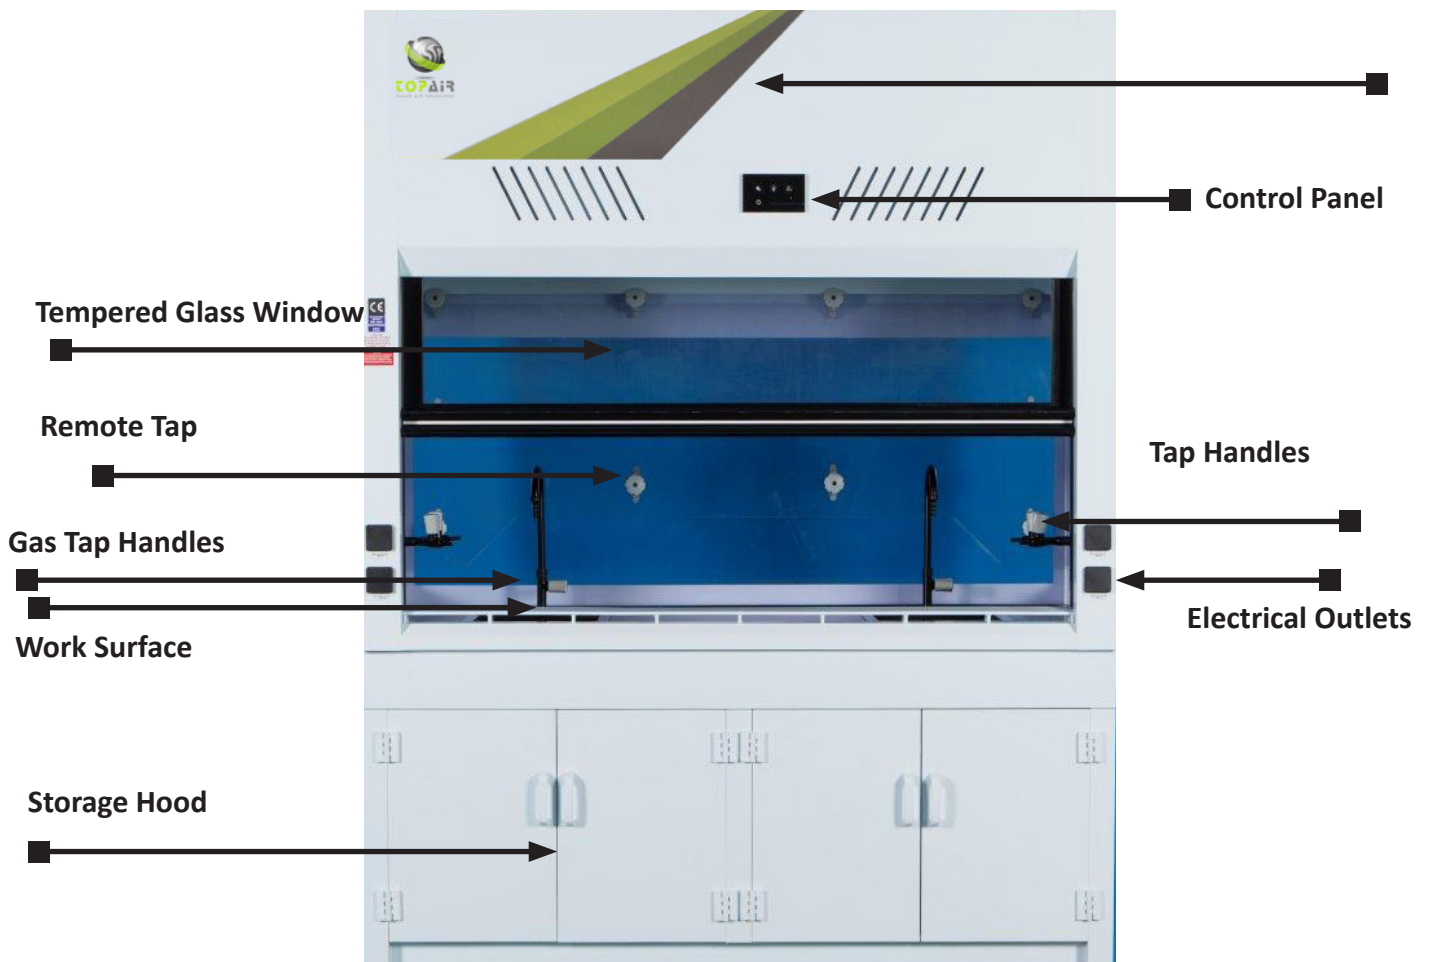

# Models

Spec/Model	FH-120-PP-CB	FH-150-PP-CB	FH-180-PP-CB	FH-200-PP-CB	FH-250-PP-CB
External Dimensions	1200 x 805 x 2320 mm	1500 x 805 x 2320 mm	1800 x 805 x 2320 mm	2000 x 805 x 2320 mm	2500 x 805 x 2320 mm
W x D x H	47.3x 31.7 x 91.3"	59.0 x 31.7 x 91.3"	70.9 x 31.7 x 91.3"	78.7 x 31.7 x 91.3"	98.4 x 31.7 x 91.3"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>					
Workspace	1000 x 630 x 1170 mm	1300 x 630 x 1170 mm	1600 x 630 x 1170 mm	1800 x 630 x 1170 mm	2300 x 630 x 1170 mm
(W x D x H)	39.4 x 24.8 x 46"	51.2 x 24.8 x 46"	63 x 24.8 x 46"	70.8 x 24.8 x 46"	90.5 x 24.8 x 46"
Front Sash Max Opening	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"	720 mm / 28.3"
Production / test Standard	EN-14175 / ASHRAE 110-1995				
Air Velocity	0.5±0.1 m/s, 100±20 FPM				
Hood Material	White Polypropylene				
Work Table Material	HPL/ Ceramic / Epoxy / PP / Stainless steel				
Optional Control System	VAV System with 9" color touch screen				
Optional	Water tap/ gas tap / vacuum tap/ pp sink				
Power Supply	110 / 220V, 50/60 Hz, Single/triple phase				
Illumination	800 LUX LED lights				


# Accessories

Description	Model
Kit for Fume Hood includes: 1 water tap, 1 gas tap, 1 cup sink and 4 power outlets	FH-KIT
Gas tap	FH-GTAP
Water tap	FH-WTAP
Polypropylene cup sink	FH-PP-SINK
Polypropylene sink 30 x 40	FH-SINK-3040
Power outlet	FH-SOCKET
Air flow monitor with audible alarm VAV+VFD installed, including 9" LCD touch screen controller	FH-VAV
Centrifugal fan 0.75 kw 2800 RPM/IE3	FH-FAN-750
Centrifugal fan 1.1 KW 2800 RPM/IE3 DIA 300 mm	FH-FAN-1100-300

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)















Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Accessories

Part Number	Description	Photo	Dimensions
HSA-10-2	Gas Tap Mouth		
HSB6-1	Gas Tap Mouth		
HSB6-3	Gas Tap Mouth		
HSA-10	Gas remote control valve		
HSB3-1	Side Wall Gas Tap		
HSA-10B	Water tap remote control		
HSB6-2	Water tap mouth		
HSA-10-2	HSA13-1		

Part Number	Description	Photo	Dimensions
HSA10-3	Water tap mouth		
HSP1-PP	Polypropylene sink		
HSP2-PP	Polypropylene sink		
HSP3-PP	Polypropylene sink		
HSP-4	Polypropylene sink		
HSP4-1	Polypropylene sink		
HSP4-2	Polypropylene sink		
HSP4-3	Polypropylene sink		

# Add-On Accessories

Part Number	Description	Photo	Dimensions
HSP5-P	Bottle trap		
HSP7-2	Polypropylene sink		
HSP7-3	Polypropylene sink		
HSD-2	Polypropylene peg board		
HSD-1B	Stainless steel peg board		
HSD-1	Polypropylene peg board		
HSD-2B	Stainless steel peg board		

# Worktops

PRODUCT/ SIZE (cm)	90	120	150	180	200
<b>Trespa Toplab Worktop</b>					
Ductless Fume hood	CF-090-WT-TT	CF-120-WT-TT	CF-150-WT-TT	CF-180-WT-TT	CF-200-WT-TT
Metal Fume hood	FH-090-WT-TT	FH-120-WT-TT	FH-150-WT-TT	FH-180-WT-TT	FH-200-WT-TT
Polypropylene Fume hood	FH-090-P-WT-TT	FH-120-P-WT-TT	FH-150-P-WT-TT	FH-180-P-WT-TT	FH-200-P-WT-TT
<b>Stainless Steel Worktop</b>					
Ductless Fume hood	CF-090-WT-SS	CF-120-WT-SS	CF-150-WT-SS	CF-180-WT-SS	CF-200-WT-SS
Metal Fume hood	FH-090-WT-SS	FH-120-WT-SS	FH-150-WT-SS	FH-180-WT-SS	FH-200-WT-SS
Polypropylene Fume hood	FH-090-P-WT-SS	FH-120-P-WT-SS	FH-150-P-WT-SS	FH-180-P-WT-SS	FH-200-P-WT-SS
<b>Ceramic Worktop</b>					
Ductless Fume hood	CF-090-WT-CE	CF-120-WT-CE	CF-150-WT-CE	CF-180-WT-CE	CF-200-WT-CE
Metal Fume hood	FH-090-WT-C	FH-120-WT-CE	FH-150-WT-CE	FH-180-WT-CE	FH-200-WT-CE
Polypropylene Fume hood	FH-090-P-WT-CE	FH-120-P-WT-CE	FH-150-P-WT-CE	FH-180-P-WT-CE	FH-200-P-WT-CE
<b>Epoxy Worktop</b>					
Ductless Fume hood	CF-090-WT-EP	CF-120-WT-EP	CF-150-WT-EP	CF-180-WT-EP	CF-200-WT-EP
Metal Fume hood	Included	Included	Included	Included	Included
Polypropylene Fume hood	FH-090-P-WT-EP	FH-120-P-WT-EP	FH-150-P-WT-EP	FH-180-P-WT-EP	FH-200-P-WT-EP

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

## Carbon Filters

Catalog no.	Description	Size
CF-90-CR	Carbon filter for Ductless fume hood size 90 cm	750x300x70mm
CF-120-CR	Carbon filter for Ductless fume hood size 120 cm	1050x300x70mm
CF-150-CR	Carbon filter for Ductless fume hood size 150 cm	1350x300x70mm
CF-180-CR	Carbon filter for Ductless fume hood size 180 cm	1650x300x70mm
CF-XXX-CR	Carbon filter for Ductless fume hood - custom size	XXXx300x70mm

## Acid Filters

Catalog no.	Description	Size
CF-90-AC	Acid filter for Ductless fume hood size 90 cm	650x300x70mm
CF-120-AC	Acid filter for Ductless fume hood size 120 cm	1050x300x70mm
CF-150-AC	Acid filter for Ductless fume hood size 150 cm	1350x300x70mm
CF-180-AC	Acid filter for Ductless fume hood size 180 cm	1650x300x70mm
CF-XXX-AC	Acid filter for Ductless fume hood - custom size	XXXx300x70mm

## Basic Filters

Catalog no.	Description	Size
CF-90-BC	Basis filter for Ductless fume hood size 90 cm	750x300x70mm
CF-120-BC	Basis filter for Ductless fume hood size 120 cm	1050x300x70mm
CF-150-BC	Basis filter for Ductless fume hood size 150 cm	1350x300x70mm
CF-180-BC	Basis filter for Ductless fume hood size 180 cm	1650x300x70mm
CF-180-XX	Basis filter for Ductless fume hood - custom size	XXXx300x70mm

## Formaldehydes Filter

Catalog no.	Description	Size
CF-90-FMD	Formaldehydes filter for ductless fume hood 90 cm	800x300x70mm
CF-120-FMD	Formaldehydes filter for ductless fume hood 120 cm	1100x300x70mm
CF-150-FMD	Formaldehydes filter for ductless fume hood 150 cm	1400x300x70mm
CF-180-FMD	Formaldehydes filter for ductless fume hood 180 cm	1700x300x70mm
CF-180-XXX	Formaldehydes filter for ductless fume hood custom size	XXXx300x70mm

## Multi Gas Filters (when using both Acids and Basic)



Catalog no.	Description	Size
CF-90-MG	Multi Gas filter for Ductless fume hood size 90 cm	750x300x70mm
CF-120-MG	Multi Gas filter for Ductless fume hood size 120 cm	1050x300x70mm
CF-150-MG	Multi Gas filter for Ductless fume hood size 150 cm	1350x300*70mm
CF-180-MG	Multi Gas filter for Ductless fume hood size 180 cm	1650*300*70mm
CF-XXX-MG	Multi Gas filter for Ductless fume hood Custom size	XXX*300*70mm

## Pre Filters

Catalog no.	Description	Size
CF-90-FR	Prefilter for Ductless fume hood size 90 cm	800x300x70mm
CF-120-FR	Prefilter for Ductless fume hood size 120 cm	1100x300x70mm
CF-150-FR	Prefilter for Ductless fume hood size 150 cm	1400x300x70mm
CF-180-FR	Prefilter for Ductless fume hood size 180 cm	1700x300*70mm
CF-XXX-FR	Prefilter for Ductless fume hood - Custom size	XXXx300*70mm

## HEPA Filters

Catalog no.	Description	Size
CF-90-HP	HEPA filter for Ductless fume hood size 90 cm	800x300x70mm
CF-120-HP	HEPA filter for Ductless fume hood size 120 cm	1100x300x70mm
CF-150-HP	HEPA filter for Ductless fume hood size 150 cm	1400x300x70mm
CF-180-HP	HEPA filter for Ductless fume hood size 180 cm	1700x300x70mm
CF-XXX-HP	HEPA filter for Ductless fume hood size 180 cm	XXXXx300x70mm

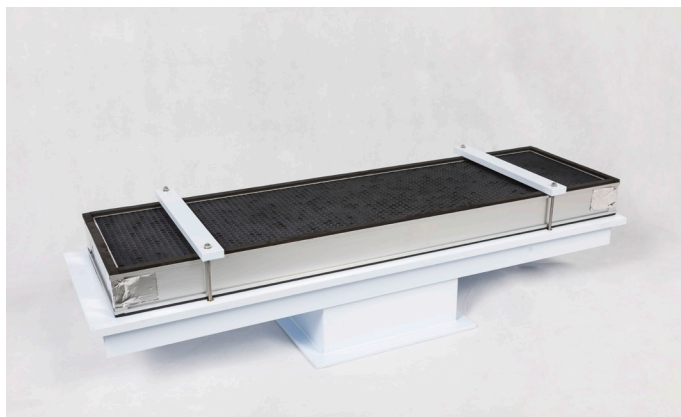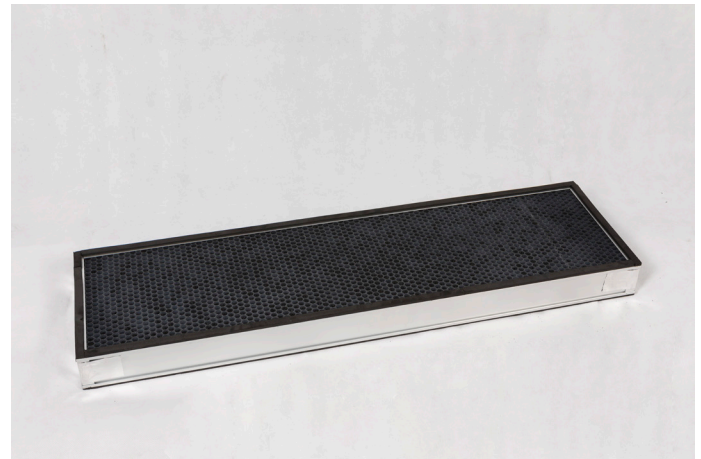

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)  
 Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Technical Ceramic Worktop



TopAir's Technical Ceramic Worktop provides a comfortable, robust, anti-corrosive working area. It's especially durable in cases of working with high temperatures and strong acids. The worktop features anti-spill raised borders. The worktop can be ordered with various sinks or openings.

- High-level durability for strong acids
- High-level durability for high temperatures
- Raised borders to prevent liquid spilling



# Specifications

Test Type	Test Result
Density *weight for unit of volume g/cm <sup>3</sup>	2.5
Modulus of Flexural	1.33*10 <sup>4</sup> MPa
Linear thermal expansion	5.6*10 <sup>-6</sup> °C <sup>-1</sup>
Resistance to high temperature	1350°C
Rockwell Hardness (HR)	52 HRC
Moh's Hardness (HM)	6
Breaking Strength	12876 N
Compressive Strength	315 MPa
Formaldehyde Release	0
Water Absorption	AVG: 0.02%    MAX:0.02%
Modulus of Rupture	AVG: 48MPa    MAX:46MPa
Radiation Test	Internal Exposure: 0.4 External Irradiation: 0.9
Impact Resistance    ( Coefficient of restitution )	0.82
Resistance to Impact - 325g steel ball drop from 0mm height	No Damage
Resistance to Bacteria	Escherichia Coil    99.13% Staphylococcus Aureus 99.09% Enterococcus Faecails 91.8%
Resistance to Stains	Class 5 & Class 1
Resistance to Abrasion	Class 4 Resistance abrasion revolution: 2100
Resistance to thermal shoc	Could not crack & desquamate
Crazing resistance	No crazing
Side with cold glaze --- Acid Resistance	98% H <sub>2</sub> SO <sub>4</sub>

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: sales@topairsystems.com

Web: www.topairsystems.com | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene Vertical Laminar Clean Bench



TopAir provides high-quality, safe Vertical Laminar Clean Benches. TopAir's clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.

In vertical benches, the filtered air is channeled downwards through a filter installed at the top of the bench. All components are produced by leading global companies, such as AAF USA.

### Advanced Operation System:


- Color 5" touch screen
- 10-speed fan
- Hour counter for filter
- Filter replacement alarm

Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO5 cleanliness standard, resembling a clean room, with the additional advantages of portability and small dimensions.

Clean benches provide a high quality alternative to a clean room at a much lower cost and without massive construction.

The clean bench complies with Test Standard **USA Federal Standard 209E / ISO 14644-1 / CE** and can be customized to customer requirements.

- Vertical air stream producing clean air at ISO-5/ CLASS100 or ISO4/Class10 standards
- Polypropylene structure with high chemical resistance
- Work surface made of 304 stainless steel
- Side windows made of tempered glass
- High efficiency quiet EC fan
- Optional stand
- Universal electrical outlet
- Innovative, advanced design
- Variety of sizes and materials
- Eco-friendly, cost-effective LED lighting
- Compliance with Test Standard: US Federal Standard 209E / ISO 14644-1 / CE

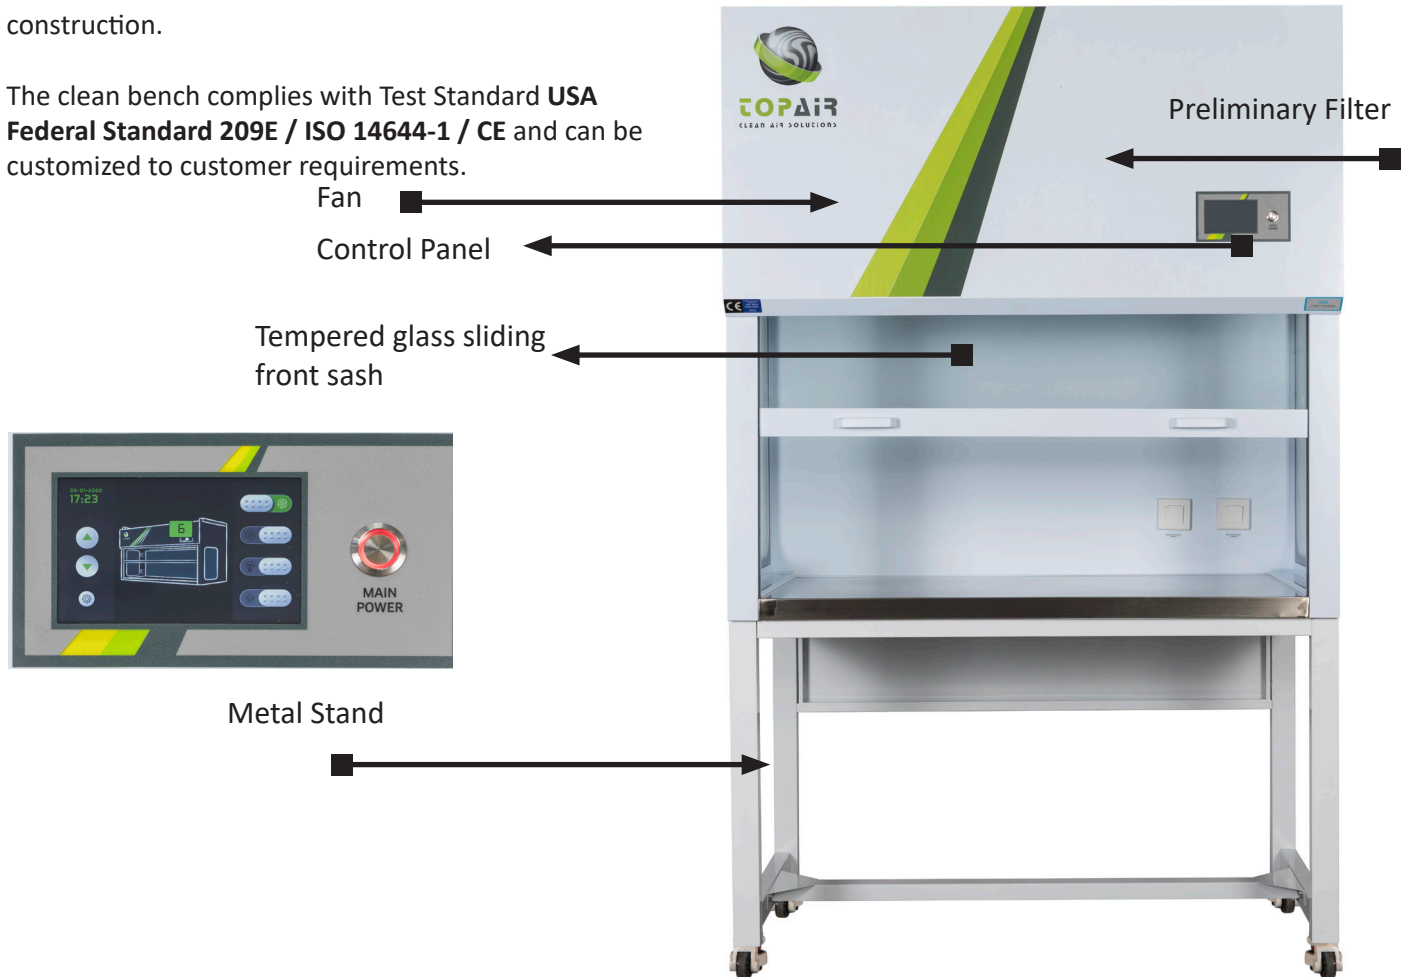

# Models

Spec/Model	HC-V090P	HC-V120P	HC-V150P	HC-V180P
Outer Dimensions W x D x H	1000 x 760 x 1250 mm 40.5 x 30 x 49.2"	1330 x 760 x 1250 mm 52.3 x 30 x 49.2"	1630 x 760 x 1250 mm 64.1 x 30 x 49.2"	1930 x 760 x 1250 mm 76 x 30 x 49.2"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>				
Workspace (W x D x H)	900 x 660 x 750 mm 35.4 x 26 x 29.5"	1200 x 660 x 750 mm 47.2 x 26 x 29.5"	1500 x 660 x 750 mm 59 x 26 x 29.5"	1800 x 660 x 750 mm 70.8 x 26 x 29.5"
Test Standard	USA Federal Standard 209E / ISO-14644-1, CE			
Air Velocity m/s	0.3 m/s, 60 FPM			
Cleanliness in Workstation	Class-100 (FS 209E) ISO 4, ISO-14644-1			
Hood Material	Polypropylene			
Work Table Material	Stainless steel SUS 304			
Noise (Tested 20 cm from the work table, 1.2m above ground)	<50dB	<50dB	<54dB	<54dB
Power Supply	110 / 220V, 50/60 Hz, Single phase			
Illumination	800 LUX LED lighting			
Filter	HEPA Filter Efficiency of 99,9995% at 0.3 Microns H14 (Optional ULPA filter)			

# Accessories

Spec/Model	HC-090	HC-120	HC-150	HC-180
Stand	HC-090-ST	HC-120-ST	HC-150-ST	HC-180-ST
Combined UV light and front sash	HC-090-UV-FS	HC-120-UV-FS	HC-150-UV-FS	HC-180-UV-FS
Separated "floating" table	HC-090-VB	HC-120-VB	HC-150-VB	HC-180-VB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene Horizontal Laminar Clean Bench

TopAir provides high quality, secure Horizontal Laminar Clean Benches. TopAir's clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.

In horizontal benches, the filtered air flows through a filter installed at the back of the bench, toward the staff.

All components are manufactured by leading global companies, such as AAF USA.

### Advanced Operation System:


- Color 5" touch screen
- 10-speed fan
- Hour counter for filter
- Filter replacement alarm

The clean bench complies with **Test Standard USA Federal Standard 209E / ISO 14644-1 / CE** and can be customized to customer requirements.

Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO5 cleanliness standard, resembling a clean room, with the additional advantages of portability and small dimensions.

Clean benches provide a high quality alternative to a clean room at a much lower cost and without massive construction.

- Horizontal air stream producing clean air in compliance with ISO5/ CLASS100 or ISO4/Class10 standards (depending on the filter installed).
- Polypropylene structure with high chemical resistance
- Work surface made of 304 stainless steel
- Side windows made of tempered glass
- High efficiency quiet EC fan
- Optional stand
- Universal electrical outlet
- Innovative, advanced design
- Variety of sizes and materials; optional stand
- Eco-friendly, cost-effective LED lighting
- Compliance with Test Standard: US Federal Standard 209E / ISO-14644-1 / CE

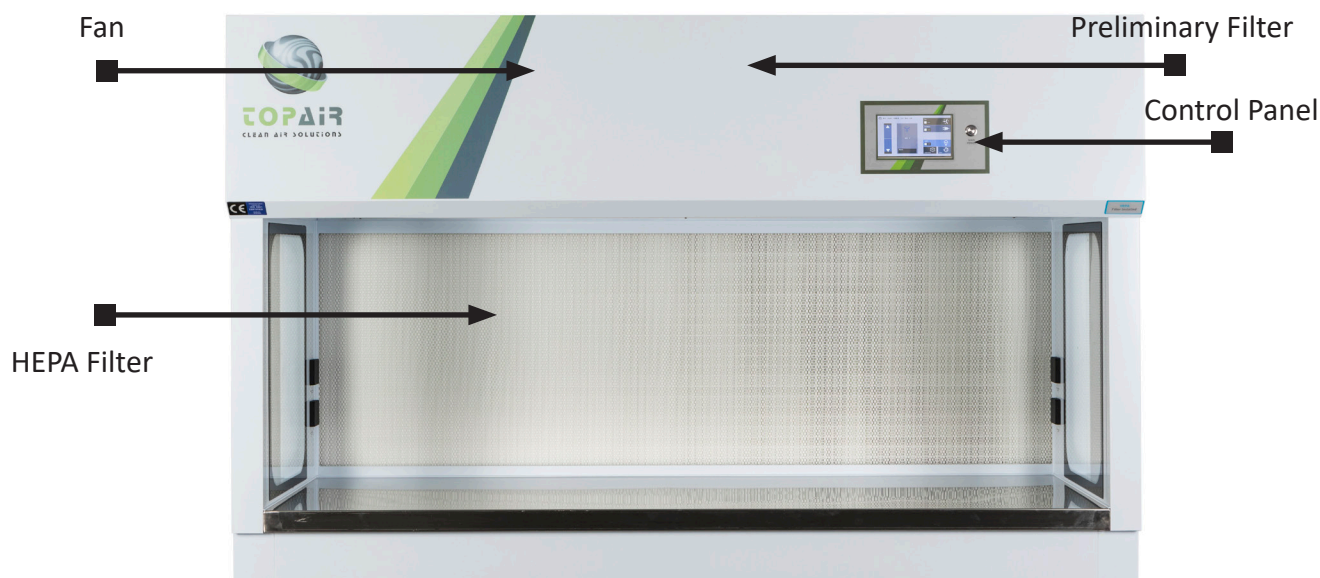

# Models

Spec/Model	HC-H090P	HC-H120P	HC-H160P	HC-H180P
<b>Outer Dimensions</b>	1030 x 930 x 1110 mm	1330 x 930 x 1110 mm	1630 x 930 x 1110 mm	1930 x 930 x 1110 mm
<b>W x D x H</b>	40.5 x 36.6 x 43.7"	52.3" x 36.6 x 43.7"	64 x 36.6 x 43.7"	76 x 36.6 x 43.7"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>				
<b>Workspace</b>	900 x 660 x 640 mm	1200 x 660 x 640 mm	1500 x 660 x 640 mm	1800 x 660 x 640 mm
<b>(W x D x H)</b>	35.4 x 26 x 25"	47.2 x 26 x 25"	59 x 26 x 25"	70.9 x 26 x 25"
<b>Test Standard</b>	USA Federal Standard 209E / ISO-14644-1, CE			
<b>Air Velocity m/s</b>	0.3 m/s, 60 FPM			
<b>Cleanliness within Workstation</b>	Class-100 (FS 209E) ISO 4, ISO-14644-1			
<b>Hood Material</b>	Polypropylene			
<b>Work Table Material</b>	Stainless steel SUS 304			
<b>Noise (Tested 20 cm from the work table, 1.2m above ground)</b>	<50dB	<50dB	<54dB	<54dB
<b>Power Supply</b>	110 / 220V, 50/60 Hz, Single phase			
<b>Illumination</b>	800 LUX LED lighting			
<b>Filter</b>	HEPA Filter Efficiency of 99,9995% at 0.3 Microns H14 (Optional ULPA filter)			

# Accessories

Spec/Model	HC-090	HC-120	HC-150	HC-180
Stand	HC-090-ST	HC-120-ST	HC-150-ST	HC-180-ST
Combined UV light and front sash	HC-090-UV-FS	HC-120-UV-FS	HC-150-UV-FS	HC-180-UV-FS
Separated "floating" table	HC-090-VB	HC-120-VB	HC-150-VB	HC-180-VB

**Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)**

**Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA**

# Polypropylene IVF Laminar Clean Bench



**NEW!**

TopAir's Polypropylene IVF Laminar Clean Bench is designed for IVF procedures, with a heating plate for an accurate 37° temperature, and a temperature display.

The clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.

In vertical benches, the filtered air is channeled downwards through a filter installed at the top of the bench.


All components are produced by leading global companies such as AAF USA.

The clean bench complies with Test Standard **USA Federal Standard 209E / ISO 14644-1 / CE** and is customized to the specifications of each client.

Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO5 cleanliness standard, resembling a clean room, with the additional advantages of portability and small dimensions.

Clean benches provide a high quality alternative to a clean room at a much lower cost and without massive construction.

- Designed for IVF procedures - heating plate for an accurate temperature of 37° and temp. display.
- Vertical air stream producing clean air at ISO5/ CLASS100 or ISO4/Class10 standards
- Polypropylene structure assures stability, preventing bench movements throughout sensitive operations.
- User-friendly digital control system
- Work surface made of 304 stainless steel
- Side windows made of tempered glass
- High efficiency quiet EC fan
- Optional stand
- Universal electrical outlet
- Innovative, advanced design
- Variety of sizes and materials
- Eco-friendly, cost-effective LED lighting
- Compliance with Test Standard: US Federal Standard 209E / ISO-14644-1 / CE

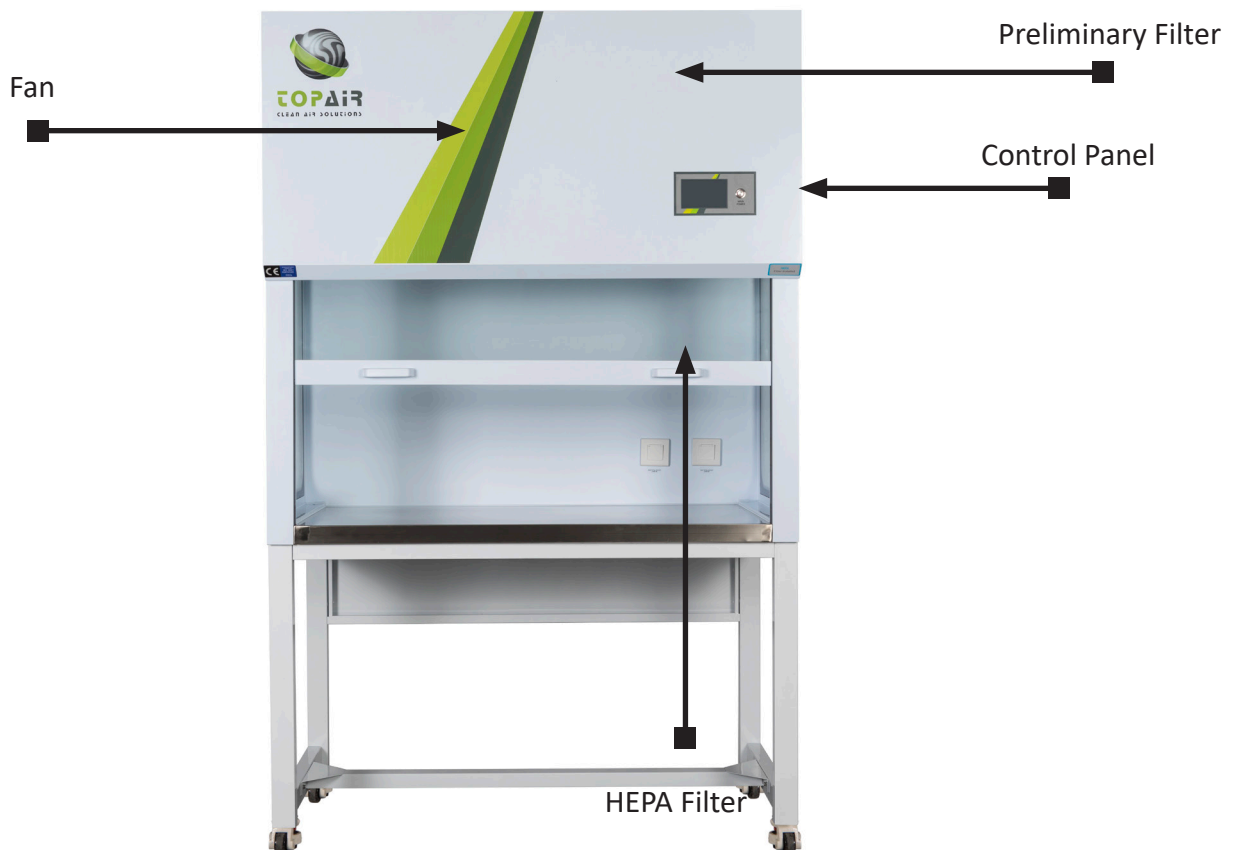

# Models

Spec/Model	HC-V090-IVF	HC-V120-IVF	HC-V150-IVF	HC-V180-IVF
Outer Dimensions W x D x H	1000 x 760 x 1250 mm 39.3 x 30 x 49.2"	1300 x 760 x 1250 mm 51.1 x 30 x 49.2"	1600 x 760 x 1250 mm 63 x 30 x 49.2"	1900 x 760 x 1250 mm 74.8 x 30 x 49.2"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>				
Workspace (W x D x H)	900 x 660 x 750 mm 35.4 x 26 x 29.5"	1200 x 660 x 750 mm 47.2 x 26 x 29.5"	1500 x 660 x 750 mm 59 x 26 x 29.5"	1800 x 660 x 750 mm 70.8 x 26 x 29.5"
Test Standard	USA Federal Standard 209E / ISO-14644-1, CE			
Air Velocity m/s	0.3 m/s, 60 FPM			
Cleanliness in Workstation	Class-100 (FS 209E) ISO 4, ISO-14644-1			
Hood Material	White polypropylene			
Work Table Material	Stainless steel SUS 304			
Noise (Tested 20 cm from the work table, 1.2m above ground)	<50dB	<50dB	<54dB	<54dB
Power Supply	110 / 220V, 50/60 Hz, Single phase			
Illumination	800 LUX LED lighting			
Filter	HEPA Filter Efficiency of 99,9995% at 0.3 Microns H14 (Optional ULPA filter)			

# Accessories

Spec/Model	HC-090	HC-120	HC-150	HC-180
Stand	HC-090-ST	HC-120-ST	HC-150-ST	HC-180-ST
Combined UV light and front sash	HC-090-UV-FS	HC-120-UV-FS	HC-150-UV-FS	HC-180-UV-FS
Separated "floating" table	HC-090-VB	HC-120-VB	HC-150-VB	HC-180-VB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Metal Vertical Laminar Clean Bench



TopAir provides high quality, safe Vertical Laminar Clean Benches. The clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.

In vertical benches, the filtered air is channeled downwards through a filter installed at the top of the bench.

All components are produced by leading global companies such as AAF USA.

### Advanced Operation System:


- Color 5" touch screen
- 10-speed fan
- Hour counter for filter
- Filter replacement alarm

The clean bench complies with Test Standard **USA Federal Standard 209E / ISO 14644-1 / CE** and is customized to the specifications of each client.

Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO5 cleanliness standard, resembling a clean room, with the additional advantages of portability and small dimensions.

Clean benches provide a high quality alternative to a clean room at a much lower cost and without massive construction.

- Vertical air stream producing clean air at ISO5/ CLASS100 or ISO4/Class10 standards
- Massive epoxy-coated and oven tempered metal structure assures stability, preventing bench movements throughout sensitive operations.
- Work surface made of 304 stainless steel
- Side windows made of tempered glass
- High efficiency quiet EC fan
- Optional stand
- Universal electrical outlet
- Innovative, advanced design
- Variety of sizes and materials
- Eco-friendly, cost-effective LED lighting
- Compliance with Test Standard: US Federal Standard 209E / ISO-14644-1 / CE

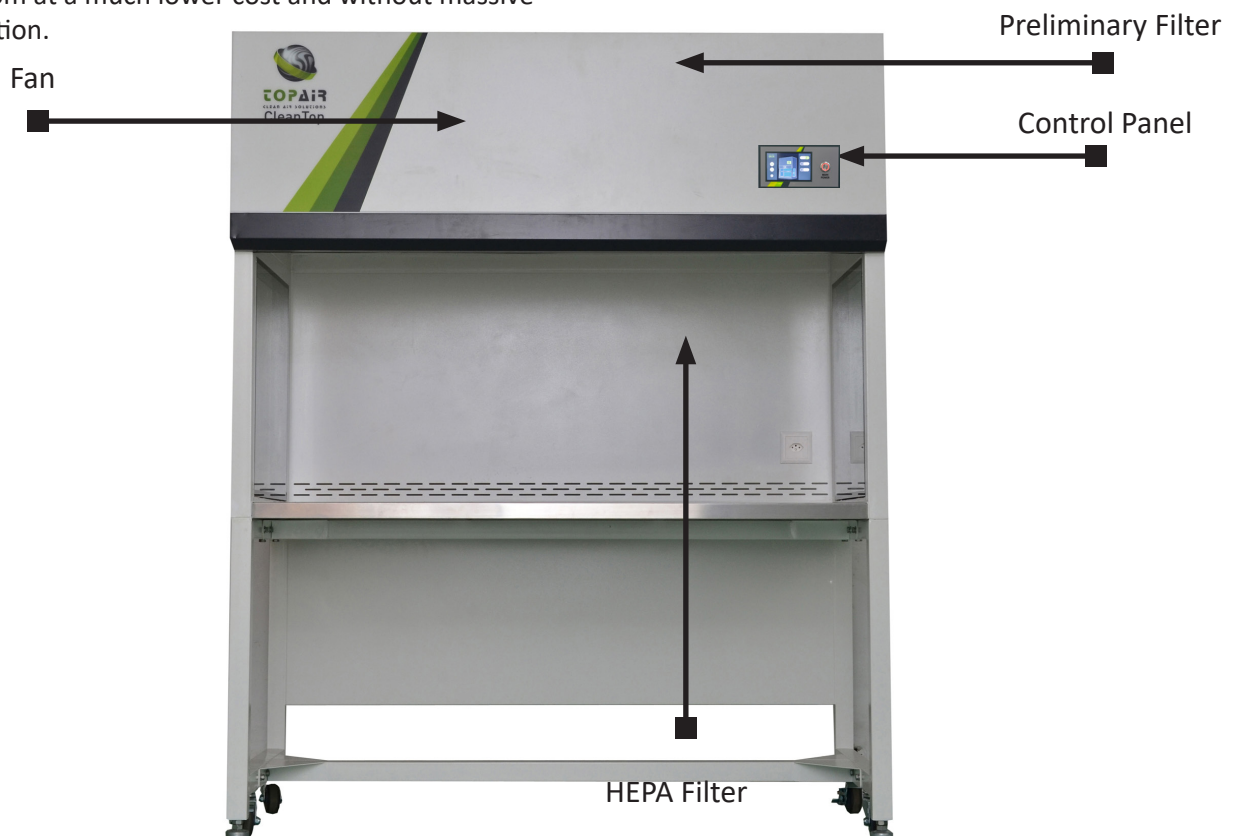

# Models

Spec/Model	HC-V090	HC-V120	HC-V150	HC-V180
Outer Dimensions	900 x 810 x 1350 mm	1200 x 810 x 1350 mm	1500 x 810 x 1350 mm	1800 x 810 x 1350 mm
W x D x H	35 x 31.9 x 53.1"	47.2 x 31.9 x 53.1"	59 x 31.9 x 53.1"	31.5 x 31.9 x 53.1"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>				
Workspace	770 x 660 x 750 mm	1070 x 660 x 750 mm	1370 x 660 x 750 mm	1670 x 660 x 750 mm
(W x D x H)	30.3 x 26 x 29.5"	42.1 x 26 x 29.5"	53.9 x 26 x 29.5"	65.7 x 26 x 29.5"
Test Standard	USA Federal Standard 209E / ISO-14644-1, CE			
Air Velocity m/s	0.3 m/s, 60 FPM			
Cleanliness in Workstation	Class-100 (FS 209E) ISO 4, ISO-14644-1			
Hood Material	High grade cold rolled steel and surface is static powder coated			
Work Table Material	Stainless steel SUS 304			
Noise (Tested 20 cm from the work table, 1.2m above ground)	<50dB	<50dB	<54dB	<54dB
Power Supply	110 / 220V, 50/60 Hz, Single phase			
Illumination	800 LUX LED lighting			
Filter	HEPA Filter Efficiency of 99,9995% at 0.3 Microns H14 (Optional ULPA filter)			

# Accessories

Spec/Model	HC-090	HC-120	HC-150	HC-180
Stand	HC-090-ST	HC-120-ST	HC-150-ST	HC-180-ST
Combined UV light and front sash	HC-090-UV-FS	HC-120-UV-FS	HC-150-UV-FS	HC-180-UV-FS
Separated "floating" table	HC-090-VB	HC-120-VB	HC-150-VB	HC-180-VB

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Metal Horizontal Laminar Clean Bench



TopAir provides high quality, safe Horizontal Laminar Clean Benches. TopAir's clean benches suck air from the room or hall space, transfer the air through a HEPA filter using a fan, and then clean the bench area with filtered air.

In horizontal benches, the filtered air flows through a filter installed at the back of the bench toward the staff.

All components are produced by leading global companies, such as AAF USA.

### Advanced Operation System:

- Color 5" touch screen
- 10-speed fan
- Hour counter for filter
- Filter replacement alarm

The clean bench complies with Test Standard USA Federal Standard 209E / ISO 14644-1/ CE and can be customized to the specifications of each client.

Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO5 cleanliness standard, resembling a clean room, with the additional advantages of portability and small dimensions.

Clean benches provide a high quality alternative to a clean room at a much lower cost and without massive construction.

- Horizontal air stream producing clean air in compliance with ISO5/ CLASS100 or ISO4/Class10 standards (depending on the filter installed).
- Massive epoxy coated, oven-tempered metal structure assures stability, preventing movement during sensitive operations.
- Work surface made of 304 stainless steel
- Side windows made of tempered glass
- High efficiency quiet EC fan
- Optional stand
- Universal electrical outlet
- Innovative, advanced design
- Variety of sizes and materials; optional stand
- Eco-friendly, cost-effective LED lighting
- Compliance with Test Standard: US Federal Standard 209E / ISO-14644-1 / CE



# Models

Spec/Model	HC-H090	HC-H120	HC-H160	HC-H180
<b>Outer Dimensions</b>	900 x 890 x 1250 mm	1200 x 890 x 1250 mm	1500x 890 x 1250 mm	1800 x 890 x 1250 mm
<b>W x D x H</b>	40.5 x 35 x 49.2	47.2 x 35 x 49.2	59 x 35 x 49.2	70.8 x 35 x 49.2
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>				
<b>Workspace</b>	770 x 610 x 640 mm	1070 x 610 x 640 mm	1370 x 610 x 640 mm	1670 x 610 x 640 mm
<b>(W x D x H)</b>	30.3 x 24 x 25.2"	47.1 x 24 x 25.2"	53.9 x 24 x 25.2"	65.7 x 24 x 25.2"
<b>Test Standard</b>	US Federal Standard 209E / ISO 14644-1			
<b>Air Velocity m/s</b>	0.3 m/s, 60 FPM			
<b>Cleanliness within Workstation</b>	Class-100 (FS 209E) ISO 4, ISO-14644-1			
<b>Hood Material</b>	High grade cold rolled steel and surface is static powder coated			
<b>Work Table Material</b>	Stainless steel SUS 304			
<b>Noise (Tested 20 cm from the work table, 1.2m above ground)</b>	<50dB	<50dB	<54dB	<54dB
<b>Power Supply</b>	110 / 220V, 50/60 Hz, Single phase			
<b>Illumination</b>	800 LUX LED lighting			
<b>Filter</b>	HEPA Filter Efficiency of 99,9995% at 0.3 Microns H14 (Optional ULPA filter)			

# Accessories

Spec/Model	HC-090	HC-120	HC-150	HC-180
Stand	HC-090-ST	HC-120-ST	HC-150-ST	HC-180-ST
Combined UV light and front sash	HC-090-UV-FS	HC-120-UV-FS	HC-150-UV-FS	HC-180-UV-FS
Separated "floating" table	HC-090-VB	HC-120-VB	HC-150-VB	HC-180-VB

**Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)**

**Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA**

# Polypropylene PCR-UV Cabinet




TopAir's Polypropylene PCR-UV cabinets offer a quality filtering system which provides complete protection from contamination.

Made of high-quality non-corrosive polypropylene, the cabinets feature a high level of chemical resistance. Polypropylene increases the product's tensile strength and improves its thermal characteristics.

The cabinets are used in the genomics, proteomics, molecular biology and forensic sciences industries.

They feature an ergonomic design and premium materials.

- Polypropylene structure with high chemical resistance
- Ozone free UV lightbulb, UV output at 1M 254nm
- Tempered glass frameless pivot window
- Eco-friendly, cost-effective 800 LUX LED lighting
- Smart safety mechanism prevents UV exposure
- User-friendly control panel with UV, lighting control & UV timer (30 min)
- Air velocity: 0.3 m/s, 60 FPM
- Optional stand

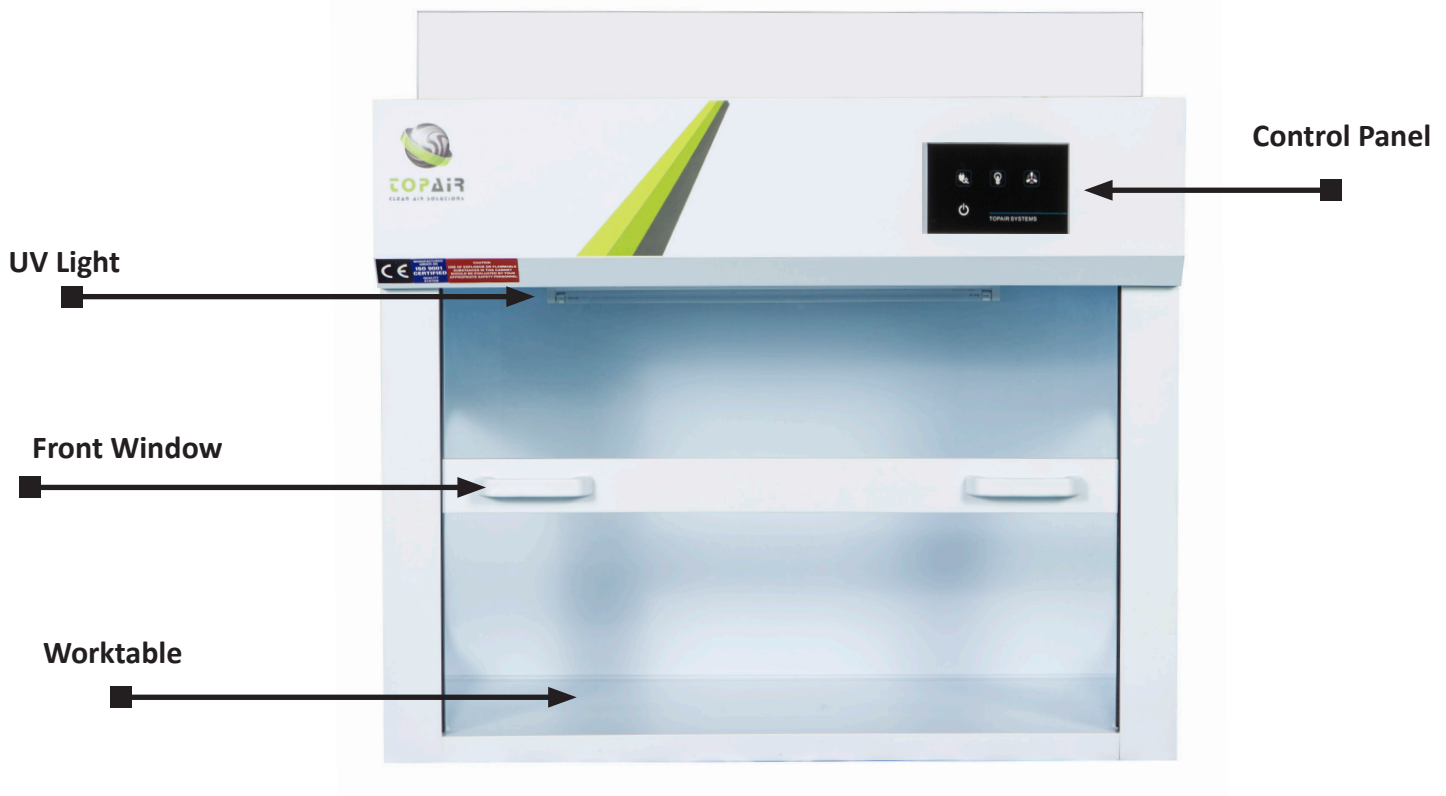

# Models

Spec/Model	PCR-060-UV	PCR-090-UV	PCR-120-UV
External Dimensions W x D x H	600 x 640 x 750 mm 23.6 x 25.2 x 29.5"	900 x 640 x 750 mm 35.4 x 25.2 x 29.5"	1200 x 640 x 750 mm 47.2 x 25.2 x 29.5"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>			
Workspace (W x D x H)	580 x 450 x 550 mm 22.8 x 17.7 x 21.6"	880 x 450 x 550 mm 34.6 x 17.7 x 21.6"	1180 x 450 x 550 mm 46.4 x 17.7 x 21.6"
Front Sash Max Opening	500 mm / 19.6"	500 mm / 19.6"	500 mm / 19.6"
Filter	None		
Cabinet Material	White Polypropylene		
UV light	17w ozone free 245nm		
Power Supply	110 / 220V , 50/60 Hz, Single phase		
Illumination	800 LUX LED lighting		

# Accessories

Spec/Model	PCR-060-ST	PCR-090-ST	PCR-120-ST
Stand W X D X H	600 X 640 X 802 mm 24 x 25.2 x 31.57"	900 X 640 X 802 mm 36 x 25.2 x 31.57"	1200 X 640 X 802 mm 48 x 25.2 x 31.57"

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)  
 Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene PCR-HEPA Cabinet



TopAir's Polypropylene PCR-HEPA cabinets offer a quality filtering system which provides complete protection from contamination.


Made of high-quality non-corrosive polypropylene, the cabinets feature a high level of chemical resistance. Polypropylene increases the product's tensile strength and improves its thermal characteristics.

The cabinets are used in the genomics, proteomics, molecular biology and forensic sciences industries.

They feature an ergonomic design and premium materials, including a cutting-edge motor fan ensuring long-term durability and low noise.

The cabinet complies with Test Standard: USA Federal Standard 209E / ISO 14644-1 and has CE certification.

- Variety of HEPA & carbon filters
- Polypropylene structure with high chemical resistance
- Ozone free UV lightbulb, UV output at 1M 254nm
- Tempered glass frameless pivot window
- Eco-friendly, cost-effective 800 LUX LED lighting
- Air velocity: 0.3 m/s, 60 FPM
- Smart safety mechanism prevents UV exposure
- User-friendly 5" control panel with UV, lighting control & UV timer (30 min)
- High efficiency quiet EC fan
- Optional stand
- ISO 6/ CLASS 1000 cleanliness level according to ISO 14644-1 and USA Federal Standard 209E, CE Certification

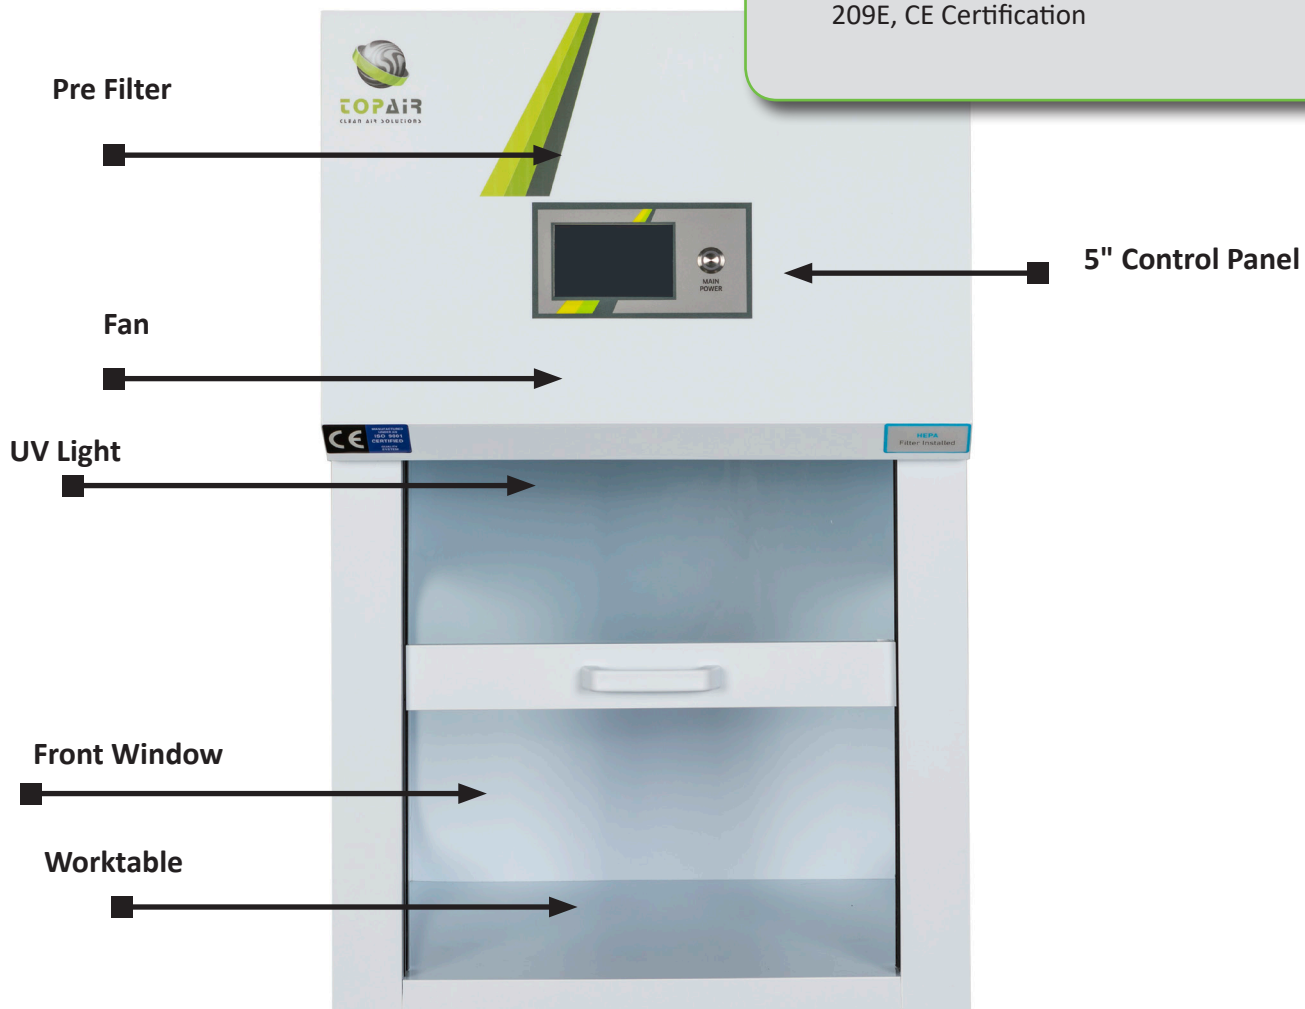

# Models

Spec/Model	PCR-060-HEPA	PCR-090-HEPA	PCR-120-HEPA
External Dimensions W x D x H	600 x 640 x 900 mm 23.6 x 25.2 x 35.4"	900 x 640 x 900 mm 35.4 x 25.2 x 35.4"	1200 x 640 x 900 mm 47.2 x 25.2 x 35.4"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>			
Workspace (W x D x H)	585 x 450 x 500 mm 23 x 17.7 x 19.7"	885 x 450 x 500 mm 34.8 x 17.7 x 19.7"	1185 x 450 x 500 mm 46.6 x 17.7 x 19.7"
Front Sash Max Opening	450 mm / 17.7"	450 mm / 17.7"	450 mm / 17.7"
Production / test Standard	USA Federal Standard 209E / ISO 14644-1, CE		
Air Velocity	0.3 m/s, 60 FPM	0.3 m/s, 60 FPM	0.3 m/s, 60 FPM
Filter	H14, HEPA		
Hood Material	White Polypropylene		
Noise (Tested 20 cm from the work table, 1.2m above ground)	< 52 dB		
UV light	17w ozone free 245nm		
Power Supply	110 / 220V , 50/60 Hz, Single phase		
Illumination	800 LUX LED lighting		

# Accessories

Spec/Model	PCR-060-ST	PCR-090-ST	PCR-120-ST
Stand W X D X H	600 X 640 X 802 mm 24 x 25.2 x 31.57"	900 X 640 X 802 mm 36 x 25.2 x 31.57"	1200 X 640 X 802 mm 48 x 25.2 x 31.57"

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene Biosafety Cabinet Class II A2



TopAir's Class II A2 Biological Safety Cabinet protects lab staff, the environment and sensitive work processes in which biological agents are applied.

The cabinet offers a high level of contamination protection, based on two advanced ULPA filters operating at a typical efficiency of @99.9995% @ 0.1 um with an airflow pattern of 70% downflow and 30% exhaust.


The cabinet is made of robust, easily-cleaned anti-corrosive polypropylene with high resistance to acids and chemicals, which is optimal for clean rooms.

The cabinet is equipped with a smart, safe and elegant touch-screen control system that protects the operator and provides alerts for periodic maintenance actions and devices' replacement.

All components have low energy consumption, LED lighting and an EC fan motor. The system also has a programmable "green" night mode, that shuts down all unnecessary electricity consumption and sets vital components at the required safety level.

The cabinet is CE certified, and complies with EN 12469.

- Polypropylene structure - high chemical resistance
- Tempered glass side walls, 304 stainless steel work surface & spill tray
- Two ULPA H15 filters @99.9995% @ 0.1 um
- High efficiency quiet EC fan, 2 integrated taps and 2 electrical outlets
- Smart 9" color touch screen control system
- Maintenance & technical faults alarms
- Timers and counters management screen
- Germicidal water proof UV light system and safety interlock mechanism
- 6 mm triplex layer safety front glass window with electrical motion system
- Programmable economical night mode
- Airflow Pattern: 70% circulation, 30% exhaust
- Economical LED light
- Adjustable stand, optional arm rest
- ISO 5/CLASS 100 cleanliness level according to ISO 14644-1 & USA Federal Standard 209E
- CE certified, complies with EN 12469

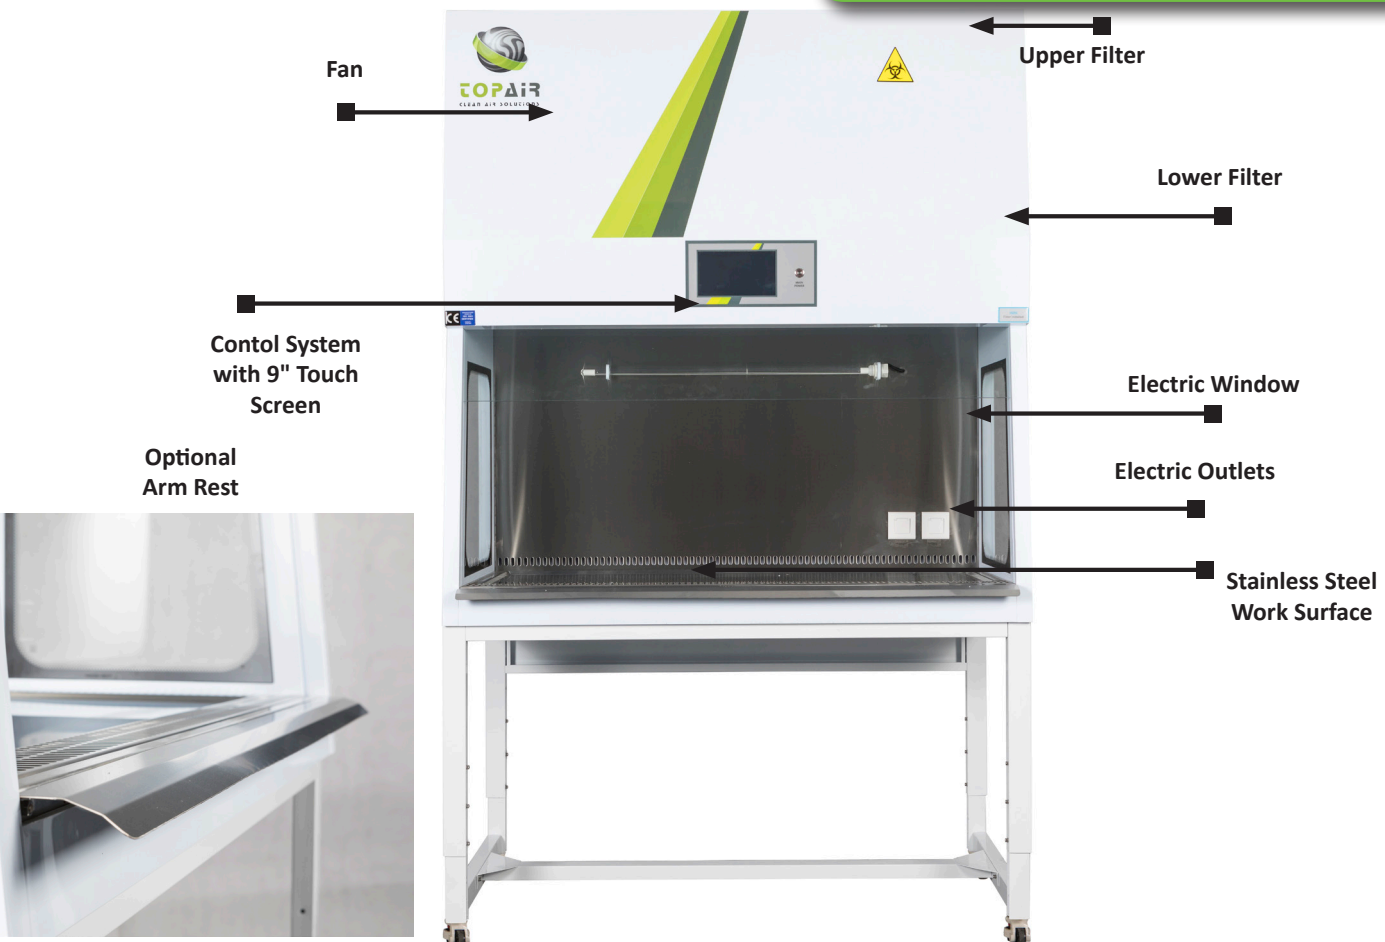

# Models

Spec/ Model	BO-090-PP	BO-120-PP	BO-150-PP	BO-180-PP
Outer Dimensions W x D x H	915 x 800 x 1500 mm 36 x 31.5 x 59"	1220 x 800 x 1500 mm 48 x 31.5 x 59"	1525 x 800 x 1500 mm 60 x 31.5 x 59"	1830 x 800 x 1500 mm 72 x 31.5 x 59"
Workspace (W x D x H)	830 x 600 x 640 mm 32.6 x 23.6 x 25.2"	1135 x 600 x 640 mm 44.7 x 23.6 x 25.2"	1440 x 600 x 640 mm 57 x 23.6 x 25.2"	1715 x 600 x 640 mm 67.5 x 23.6 x 25.2"
Front Sash Max Opening	450 mm / 17.7"			
Production/ Test Standard	CE / In Accordance with EN12469			
Downflow Velocity	0.33 m/s, 60 Fpm			
Inflow velocity	0.5 m/s, 100 fpm			
Airflow pattern	70% circulation, 30% exhaust			
Cleanliness level	Class 100/ISO 5			
Hood Material	Welded white polypropylene structure with stainless still 304 worktop			
Adjustable Stand Heights	70/80/90 cm			
Noise (Tested 20 cm from the work table, 1.2m above ground)	<52dB	<52dB	<54dB	<60dB
Power Supply	115 / 230V, 50/60 Hz, Single phase			
Illumination	800 LUX, Eco-friendly LED lighting			
Filters	ULPA H15 Efficiency @99.9995% @ 0.1 um			

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Metal-Free Polypropylene Biosafety Cabinet Class II A2



TopAir's Full-Polypropylene Biosafety Cabinet Class II A2 protects lab staff, the environment and sensitive work processes in which biological agents are applied.

The product offers a high level of contamination protection, based on two advanced ULPA filters operating at a typical efficiency of @99.9995% @ 0.1 um with an airflow pattern of 70% downflow and 30% exhaust.


The cabinet structure is 100% polypropylene, including all components, both external and internal. The robust, easily-cleaned anti-corrosive polypropylene offers high resistance to acids and chemicals, which is optimal for clean rooms.

The cabinet is equipped with a smart, safe and elegant touch-screen control system that protects the operator and provides alerts for periodic maintenance actions and devices' replacement.

All components have low energy consumption, LED lighting and an EC fan motor. The system also has a programmable "green" night mode, that shuts down all unnecessary electricity consumption and sets vital components at the required safety level.

The cabinet is CE certified, and complies with EN 12469.

- 100% Polypropylene structure - high chemical resistance
- Tempered glass side walls
- Two ULPA H15 filters @99.9995% @ 0.1 um
- High efficiency quiet EC fan, 2 integrated taps and 2 electrical outlets
- Smart 9" color touch screen control system
- Maintenance & technical faults alarms
- Timers and counters management screen
- Germicidal water proof UV light system and safety interlock mechanism
- 6 mm triplex layer safety front glass window with electrical motion system
- Programmable economical night mode
- Airflow Pattern: 70% circulation, 30% exhaust
- Economical LED light, adjustable stand
- ISO 5/CLASS 100 cleanliness level according to ISO 14644-1 & USA Federal Standard 209E
- CE certified, complies with EN 12469

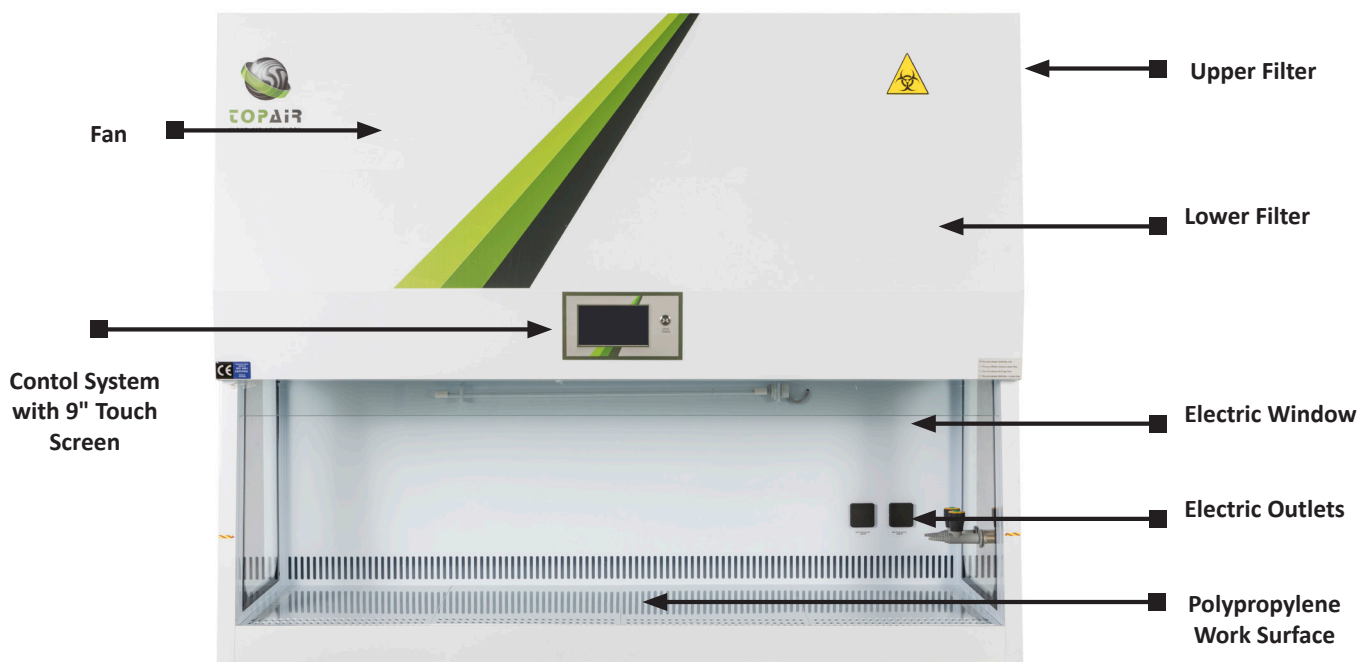

# Models

Spec/ Model	BO-090-MF	BO-120-MF	BO-150-MF	BO-180-MF
Outer Dimensions W x D x H	915 x 800 x 1500 mm 36 x 31.5 x 59"	1220 x 800 x 1500 mm 48 x 31.5 x 59"	1525 x 800 x 1500 mm 60 x 31.5 x 59"	1830 x 800 x 1500 mm 72 x 31.5 x 59"
Workspace (W x D x H)	830 x 600 x 640 mm 32.6 x 23.6 x 25.2"	1135 x 600 x 640 mm 44.7 x 23.6 x 25.2"	1440 x 600 x 640 mm 57 x 23.6 x 25.2"	1715 x 600 x 640 mm 67.5 x 23.6 x 25.2"
Front Sash Max Opening	450 mm / 17.7"			
Production/ Test Standard	CE / In Accordance with EN12469			
Downflow Velocity	0.33 m/s, 60 Fpm			
Inflow velocity	0.5 m/s, 100 fpm			
Airflow pattern	70% circulation, 30% exhaust			
Cleanliness level	Class 100/ISO 5			
Hood Material	Welded white polypropylene structure (internal and external)			
Noise (Tested 20 cm from the work table, 1.2m above ground)	<55dB	<55dB	<57dB	<63dB
Power Supply	115 / 230V, 50/60 Hz, Single phase			
Illumination	800 LUX, Eco-friendly LED lighting			
Filters	ULPA H15 Efficiency @99.9995% @ 0.1 um			

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene Biosafety Cabinet Class II B2



TopAir's Class II B2 Biological Safety cabinet, featuring 100% exhaust, protects lab staff, the environment and sensitive work processes in which biological agents are applied.

The cabinet offers a high level of contamination protection, based on two advanced ULPA H15 filters operating at an efficiency of @99.9995% @ 0.1 um.

The cabinet is made of robust, easily-cleaned anti-corrosive polypropylene with high resistance to acids and chemicals, which is optimal for clean rooms.

The cabinet is equipped with a smart, safe and elegant touch-screen control system that protects the operator and provides alerts for periodic maintenance actions and devices' replacement.

All components have low energy consumption, LED lighting and an EC fan motor. The system also has a programmable "green" night mode, that shuts down all unnecessary electricity consumption and sets vital components at the required safety level.

The cabinet is CE certified.

- Polypropylene structure with high chemical resistance
- Tempered glass side walls, 304 stainless steel work surface & spill tray
- Two ULPA H15 filters - efficiency @99.9995% @ 0.1 um
- High efficiency quiet EC fan, 2 integrated taps and 2 electrical outlets
- Smart 9" color touch screen control system
- Technician calibration screen
- Maintenance & technical faults alarms
- Timers and counters management screen
- Germicidal water proof UV light system and safety interlock mechanism
- 6 mm triplex layer safety front glass window with electrical motion system
- Programmable economical night mode
- Economical LED light
- 100% exhaust
- Adjustable stand, optional arm rest
- ISO 5/ CLASS 100 cleanliness level according to ISO 14644-1 & USA Standard 209E



# Models

Spec/ Model	BO-090-PP-B	BO-120-PP-B	BO-150-PP-B	BO-180-PP-B
Outer Dimensions W x D x H	915 x 800 x 1500 mm 36 x 31.5 x 59"	1220 x 800 x 1500 mm 48 x 31.5 x 59"	1525 x 800 x 1500 mm 60 x 31.5 x 59"	1830 x 800 x 1500 mm 72 x 31.5 x 59"
Workspace (W x D x H)	830 x 600 x 640 mm 32.6 x 23.6 x 25.2"	1135 x 600 x 640 mm 44.7 x 23.6 x 25.2"	1440 x 600 x 640 mm 57 x 23.6 x 25.2"	1715 x 600 x 640 mm 67.5 x 23.6 x 25.2"
Front Sash Max Opening	450 mm / 17.7"			
Production/ Test Standard	CE / In Accordance with EN12469			
Downflow Velocity	0.33 m/s, 60 FPM			
Inflow velocity	0.5 m/s, 100 fpm			
Airflow pattern	100% exhaust			
Cleanliness level	Class 100/ISO 5			
Hood Material	Welded white polypropylene structure with stainless still 304 worktop			
Noise (Tested 20 cm from the work table, 1.2m above ground)	<52dB	<52dB	<54dB	<60dB
Power Supply	115 / 230V, 50/60 Hz, Single phase			
Illumination	800 LUX, Eco-friendly LED lighting			
Filters	ULPA H15 Efficiency @99.9995% @ 0.1 um			

\* External fan and ducts are available upon request (not included)

**Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)**  
**Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA**



# Ecoline Biosafety Cabinet Class II A2



TopAir's Ecoline Biosafety Cabinet protects lab staff, the environment and sensitive work processes in which biological agents are applied.

A compact, especially cost-effective benchtop unit, the cabinet offers a high level of contamination protection, based on two advanced ULPA H15 filters operating at an efficiency of @99.9995% @ 0.1 um, with an airflow pattern of 70% downflow and 30% exhaust.

The cabinet is made of robust, easily-cleaned anti-corrosive polypropylene with high resistance to acids and chemicals, which is optimal for clean rooms.


The cabinet is equipped with a smart, safe and elegant touch-screen control system that protects the operator and provides alerts for low airflow levels.

All components have low energy consumption, LED lighting and fan.

The cabinet is CE certified.

- Polypropylene structure with high chemical resistance
- 304 stainless steel work surface & spill tray
- Two ULPA H15 filters at Efficiency @99.9995% @ 0.1 um
- High efficiency quiet EC fan, 2 integrated taps and 2 electrical outlets
- Smart 7" color touch-screen control system
- Technician calibration screen
- Faults alarms
- Germicidal UV light system and safety interlock mechanism
- 6 mm triplex layer safety front glass window with electrical motion system
- Economical LED light
- CE certified

**NEW!**

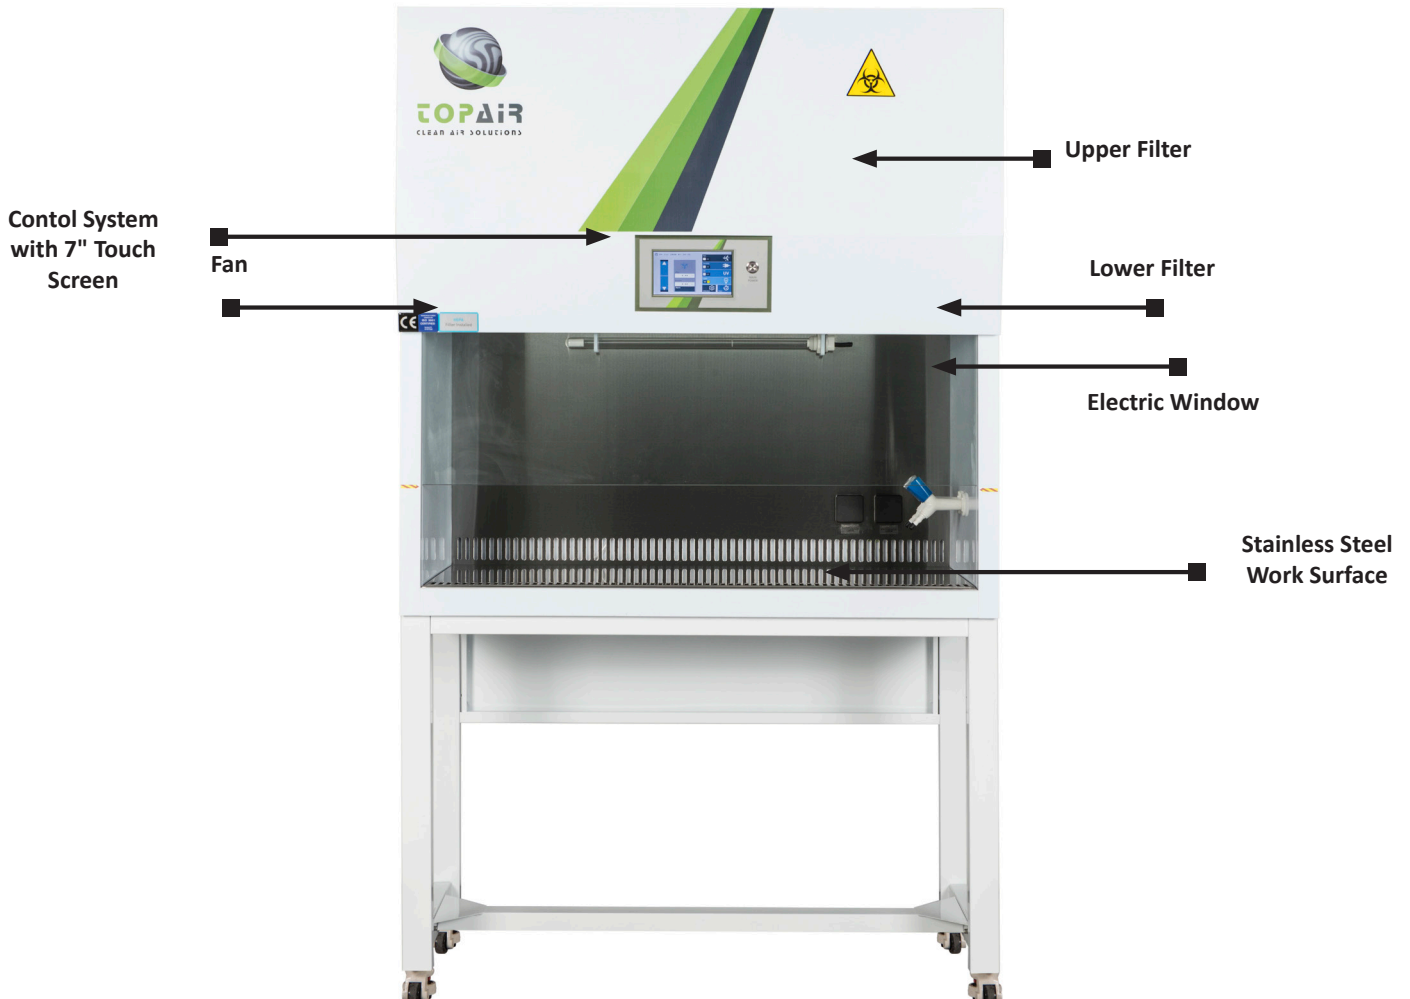

# Models

Spec/ Model	ECO-BO-080-PP	ECO-BO-120-PP
Outer Dimensions W x D x H	800 x 680 x 1220 31.5 x 26.7 x 48"	1200 x 680 x 1220 47.2 x 26.7 x 48"
Workspace (W x D x H)	720 x 500 x 570 28.3 x 19.7 x 22.4"	1120 x 500 x 570 44 x 19.7 x 22.4"
Front Sash Max Opening	400 mm / 15.7	400 mm / 15.7
Filter Type	ULPA H15 Efficiency @99.9995% @ 0.1 um	ULPA H15 Efficiency @99.9995% @ 0.1 um
Downflow Velocity	0.33 m/s, 60 FPM	0.33 m/s, 60 FPM
Inflow velocity	0.5 m/s, 100 fpm	0.5 m/s, 100 fpm
Airflow pattern	70% circulation, 30% exhaust	70% circulation, 30% exhaust
Cleanliness level	Class 100/ISO 5	Class 100/ISO 5
Cabinet Material	Welded white polypropylene structure with stainless still 304 worktop	Welded white polypropylene structure with stainless still 304 worktop
Noise (Tested 20 cm from the work table, 1.2m above ground)	<52dB	<52dB
Power Supply	115/230V, 50/60 Hz, Single phase	115/230V, 50/60 Hz, Single phase
Illumination	LUX, Eco-friendly LED lighting 800	LUX, Eco-friendly LED lighting 800
Filters	ULPA H15 Efficiency @99.9995% @ 0.1 um	ULPA H15 Efficiency @99.9995% @ 0.1 um

## Optional Accessories

MODEL	ACCESSORY
ECO-BO-120-ST	Metal Stand
ECO-BO-080-ST	Metal Stand
ECO-BO-ST-CA	Set of Casters

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# Polypropylene Lab Storage Cabinet



TopAir's high quality lab storage cabinet combines an ergonomic design and premium materials.


The cabinet is made of white polypropylene featuring a high level of corrosive resistance.

The cabinet complies with international standards, protecting lab staff from inhaling harmful chemicals and providing Convenient solution, and storage for bottles and cans.

## Hood configuration options

- Lab Storage cabinet with fuming duct connection - can be connected to an existing fuming system.
- Lab Storage cabinet with built-in fan & fuming duct connection - an independent unit that channels the airflow outside the building using flexible ducting.
- Lab Storage cabinet with fan & filter system - an independent unit that provides fuming for the Hood interior with no need for ducting/pipes

- Polypropylene structure with high chemical resistance
- Observation windows from hermetically tempered glass
- Door locks
- Ventilation openings at the sides and top of the Hood
- 3 shelves inside the cabinet
- Optional suction fan
- **PPS Option**

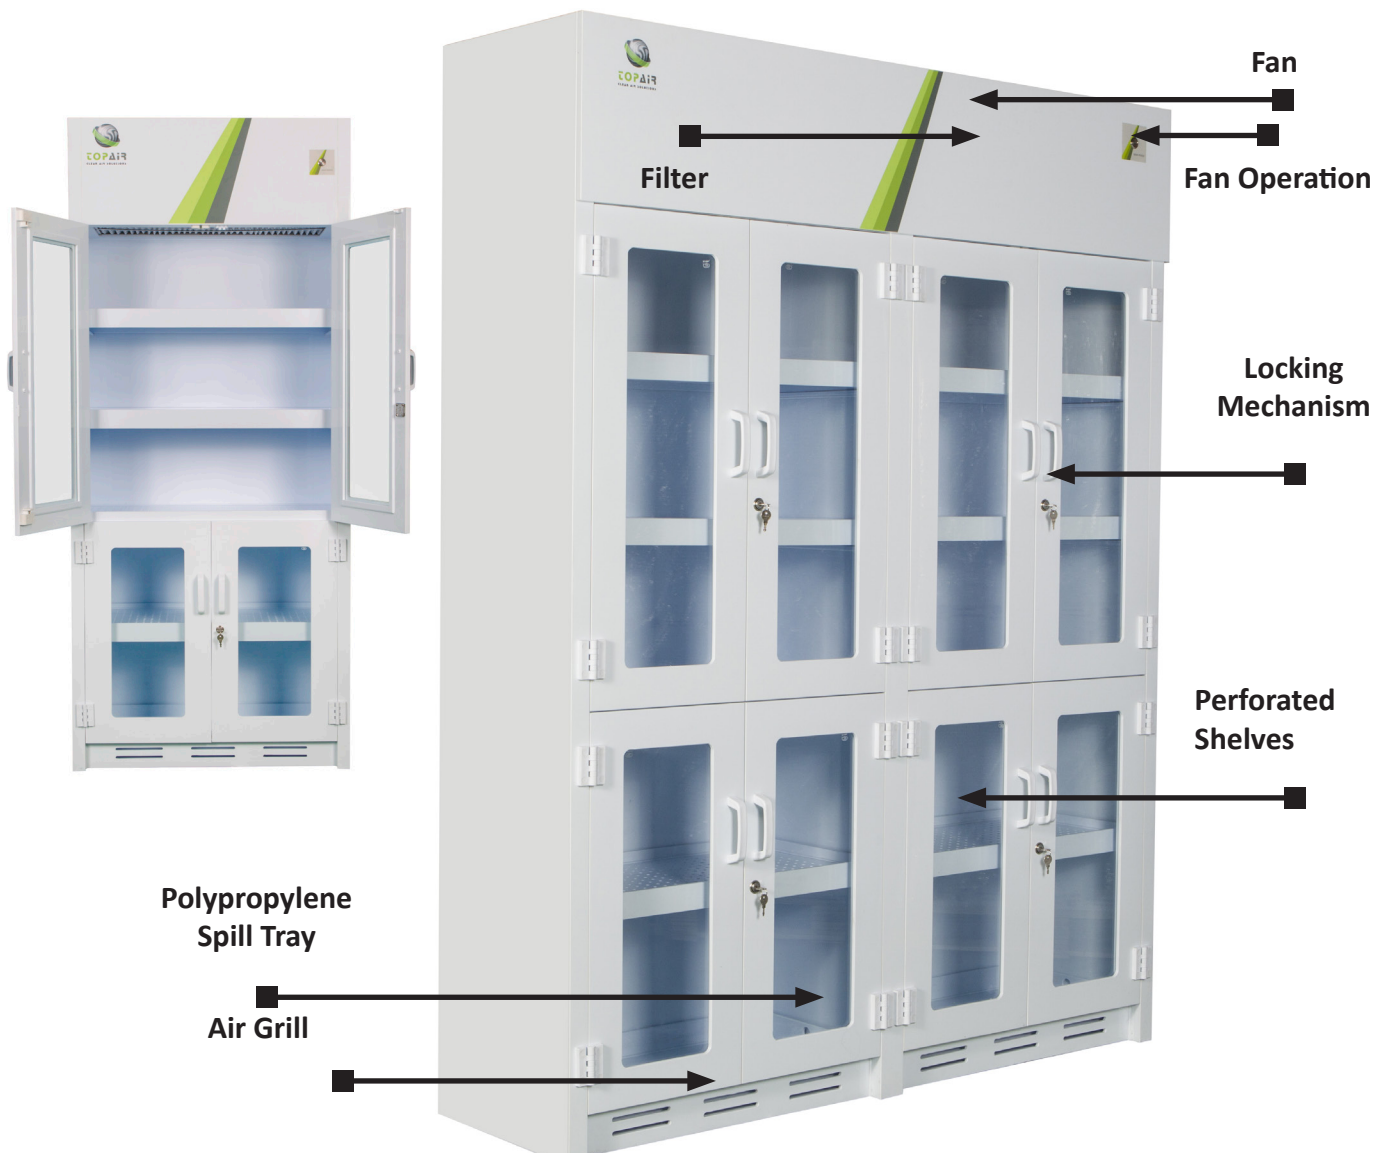

# Models

Spec/Model	LFC-PF-900-PP	LFC-PF-1200-PP	LFC-PF-1600-PP
<b>Description</b>	Lab storage cabinet with duct fuming connection	Lab storage cabinet with duct fuming connection	Lab storage cabinet with duct fuming connection
<b>External Dimensions (W x D x H)</b>	900 x 450 x 2100 mm 35.43 x 17.71 x 82.7"	1200 x 450 x 2100 mm 47.2 x 17.71 x 82.7"	1600 x 450 x 2100 mm 63 x 17.71 x 82.7"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>			
<b>Hood Material</b>	White polypropylene, 6 mm Tempered Glass		

## With Filtration System

(including carbon/HEPA filters and powerful economical consumption fan)

Spec/Model	LFC-AFF-900-PP	LFC-AFF-1200-PP	LFC-AFF-1600-PP
<b>Description</b>	Lab storage cabinet with independent fume filtering systems	Lab storage cabinet with independent fume filtering systems	Lab storage cabinet with independent fume filtering systems
<b>External Dimensions (W x D x H)</b>	900 x 450 x 2100 mm 35.43 x 17.71 x 82.7"	1200 x 450 x 2100 mm 47.2 x 17.71 x 82.7"	1600 x 450 x 2100 mm 63 x 17.71 x 82.7"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>			
<b>Hood Material</b>	White polypropylene, 6 mm Tempered Glass		
<b>Power Supply</b>	110/220V 50/60 Hz		

# Accessories

<b>LFC-SPT</b>
Polypropylene spill tray

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# VAV - Auto Air Velocity Control System



TopAir's advanced VAV system measures the product's air velocity using a high quality sensor, and adjusts the air velocity speed to the relevant standard.

The system enables maximal energy savings, by flexibly adjusting the fan speed (high/low) to changing needs. Further savings are enabled in the area of air conditioning, as the air flow from the room is reduced when the fan operates at a lower speed. This also reduces the fume hood's noise level.

The system keeps the user updated as to the airflow speed at all times and provides alerts on deviations from the required speed to prevent hazardous situations.

TopAir's VAV System introduces an entirely new concept for intelligent operation of fume hoods. As a complete solution, all its components are already integrated, configured and programmed - a true plug-and-play system. Eliminating the need to separately purchase a control system, touch screen and frequency inverter, and employing technicians to integrate and install each component, the VAV System offers the customer a full cost-effective solution.

The VAV System can be used to renovate an existing fume hood, or can be installed in a new fume Hood. In both cases, it upgrades the fume Hood to a high-end intelligent system.

The VAV System comprises:

- A touch screen including visual and audio indicators for alerts, as well as a mute button.
- A unit including sensors and power supply for the screen.
- VFD (Variable Frequency Drive) which controls the frequency and voltage supplied to the motor.
- Made in the USA, the VAV System is a highly reliable and user-friendly system for setup and use.

Upon a failure, the interior of the cabinet is lighted up in bright red, so that staff, including people with hearing issues, can easily detect the failure from a distance.


The system can be installed in research labs, healthcare facilities, life science companies, universities, and more.

- 9" color touch screen with display and control for set point, air velocity, alerts and configuration information
- High quality frequency inverter
- A variety of HOTWIRE sensor systems which enables changes according to customer requests
- Simple user friendly interface
- Can renovate an existing system
- Cost effective as it includes a high-end frequency inverter
- Frequency inverter maximizes efficiency and prevents motor noises



# Models

Category	VAV-9
Screen	9" color touch screen
Function	Auto air velocity control systems (VAV + VFD) and central operating system for fume hoods
Display range	0 - 2 m/s
Low alarm range set point	Settable
Output	3 phase 3 x 230v
Analog in	0-10 VDC
Input power	110-220 V, 50/60 hz

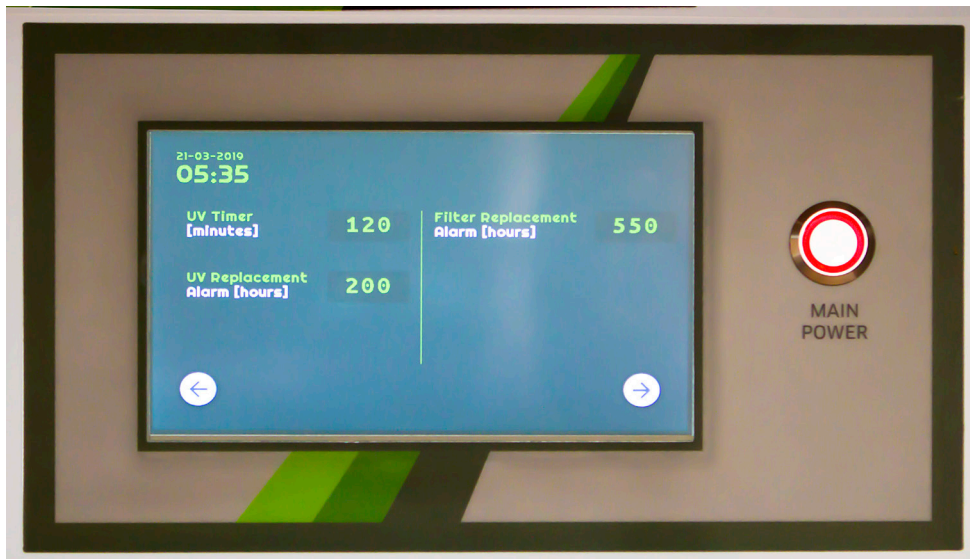

# Outdoor Centrifugal Fans

**NEW!**



TopAir Systems offers high-quality outdoor centrifugal fans.

The roof/side wall fans are weather resistant, based on a PVC structure and polypropylene impeller.

A 3-phase motor with water protection level of IP 55 operates at 380 VAC.

TopAir's variety of sizes, flows and accessories allows choosing the exact fan suitable for the client's needs.



## Models

Fan Model	RPM	Pressure (PA)	M3/H	Power	Structure	Impeller	Power Supply	Water Resistance	Sound Level	Weight
FH-FAN-750	2850	510	2000	750 W	PVC	PP Dia 400 mm W-200 mm	3 Phase 380V	IP 55	70 dBA	25 kg
		500	2200							
		490	2400							
		470	2600							
		440	2800							
		420	3000							
		380	3200							
		340	3400							
		300	3600							

Fan Model	RPM	Pressure (PA)	M3/H	Power	Structure	Impeller	Power Supply	Water Resistance	Sound Level	Weight
FH-FAN-1100	2850	510	3600	1100W	PVC	PP Dia 550 mm W-250 mm	3 Phase 380V	IP 55	70 dBA	30 kg
		500	3800							
		490	4000							
		470	4200							
		440	4400							
		420	4600							
		380	4800							
		340	5000							
		300	5200							



## Fan Accessories

P/N	FH-M-DAM	FH-EXM	FH-WRACK
Description	Fan Manual Damper	Explosion Proof Fan Motor	Metal Fan Wall Rack

# Washing Station

TopAir's Washing Station is designed for cleaning tools and equipment in lab environments.

The Washing Station is made of polypropylene with high chemical resistance, to serve the needs of laboratories.

The product's size can be customized to customer needs to accommodate any lab.

The Washing Station can contain sinks, taps, peg boards, drawers and shelves upon request.

- Designed for cleaning tools and equipment in labs
- Polypropylene structure with high chemical resistance
- Convenient access to all tools
- Size is made to requirements
- Optional accessories: Sinks, taps, peg boards, drawers, shelves



## Models

Item	Size (cm)	Description
FR-WT-10070	100*70*80	Includes sink size 30*40 and swan tap
FR-WT-12070	120*70*80	Includes sink size 30*40 and swan tap
FR-WT-14070	140*70*80	Includes sink size 30*40 and swan tap
FR-WT-16070	160*70*80	Includes sink size 30*40 and swan tap
FR-WT-10070-PG	100*70*80	Includes sink size 30*40 and swan tap + 550*700 peg board
FR-WT-12070-PG	120*70*80	Includes sink size 30*40 and swan tap + 550*700 peg board
FR-WT-14070-PG	140*70*80	Includes sink size 30*40 and swan tap + 550*700 peg board
FR-WT-16070-PG	160*70*80	Includes sink size 30*40 and swan tap + 550*700 peg board



Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)  
Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA



# Aluminum Cyanoacrylate Fuming Chamber



TopAir's Cyanoacrylate Fuming Chamber is used to develop latent prints from non-porous surfaces in a safe, controlled environment.

Cyanoacrylate is placed inside the chamber while evidence is easily positioned using the adjustable hanging rods. Starting the cycle triggers the automatic system to control the hotplate, humidity, door lock, internal circulation fan and purge cycle.

The system's recirculatory design enables it to operate and setup with no ducting required.

The cyanoacrylate vapors are filtered by a carbon filter. This ensures that no dangerous substances are exhausted into the atmosphere surrounding the laboratory. Its ductless construction also allows the unit to be easily moved and transported.

- Control system displays all parameters of the processing cycle
- Adjustments to the presets can quickly be performed
- Can be activated automatically, or manually with an option for temperature and humidity control
- Filtering system with a carbon filter
- Eco-friendly, cost-saving LED lighting
- CE certified




# Models

Spec/Model	SG-060	SG-075	SG-090	SG-150	SG-180
Airflow (m3/hr)	175	250	250	250	250
Dimensions W x D x H	600 x 600 x 760 mm 23.6 x 23.6 x 29.9"	750 x 750 x 1550 mm 29.5 x 29.5 x 61"	900 x 750 x 1550 mm 35.4 x 29.5 x 61"	1500 x 750 x 1550 mm 59 x 29.5 x 61"	1800 x 750 x 1550 mm 70.8 x 29.5 x 61"
Noise	<48 dBA	<48 dBA	<48 dBA	<48 dBA	<48 dBA
(Tested 20 cm from the work table, 1.2m above ground)					
Lighting	LED 18 W	LED 18 W	LED 18 W	LED 18 W	LED 18 W
Main Filter (Qty.)	3 kg	5 kg	5 kg	8 kg	8 kg
Prefilter (Qty.)	1	1	1	1	1
Power Supply	115 / 230V 50/60 Hz, Single phase				
Switches	Main ON/OFF				
Monitoring	Electronic Display				
Fan	Low Noise Centrifugal				
Construction	Aluminum Frame Structure, Safety Triplex Glass				
Production/Test Standard	CE				

## Programmable Electronic Control

The electronic control system includes easy on-screen functions to program the Purge Cycle, Contact Time and RH Sensor.

Filter Type	P/N	
Main Filter	SG-CF	Main and Pre Filters are supplied as standard with all chambers and are listed here for replacement purposes.
Pre Filter	SG-PF	* Prefilters are supplied with all units. Efficiencies are over 99.6%. The filters remove particles from the airstream before it flows through the Main Filter. ** Filters must be changed on a regular basis to maintain chamber efficiency.



## Operation Process

- Evidence is placed within the chamber and cyanoacrylate is placed on the hotplate.
- Door is closed and start button is pushed. Door locks automatically.
- Evidence is placed within the chamber.
- Humidifier is activated, increases humidity and releases vapors composed of 60%-80% humidity and fumes into the chamber.
- Fuming continues for a half-hour cycle.
- Once the cycle has completed, the evidence can be examined.

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: sales@topairsystems.com

Web: www.topairsystems.com | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA



# Polypropylene Cyanoacrylate Fuming Chamber




TopAir's Cyanoacrylate Fuming Chamber is used to develop latent prints from non-porous surfaces in a safe, controlled environment.

Cyanoacrylate is placed inside the chamber while evidence is easily positioned using the adjustable hanging rods. Starting the cycle triggers the automated system to control the hotplate, humidity, door lock, internal circulation fan and purge cycle.

Its recirculatory design enables the system to operate and setup with no ducting required.

The cyanoacrylate vapors are filtered by a carbon filter. This ensures that no dangerous substances are exhausted in to the atmosphere surrounding the laboratory. Its ductless construction also allows the unit to be easily moved and transported.

- Control System dispaly all parameters of the processing cycle
- Can be activated automatically, or manually with an option for temperature and humidity control.
- Filtering system with a carbon filter
- Eco-friendly, cost-saving LED lighting
- Alarm for end of automatic cycle
- Audio-Visual 30-second alarm
- CE certified

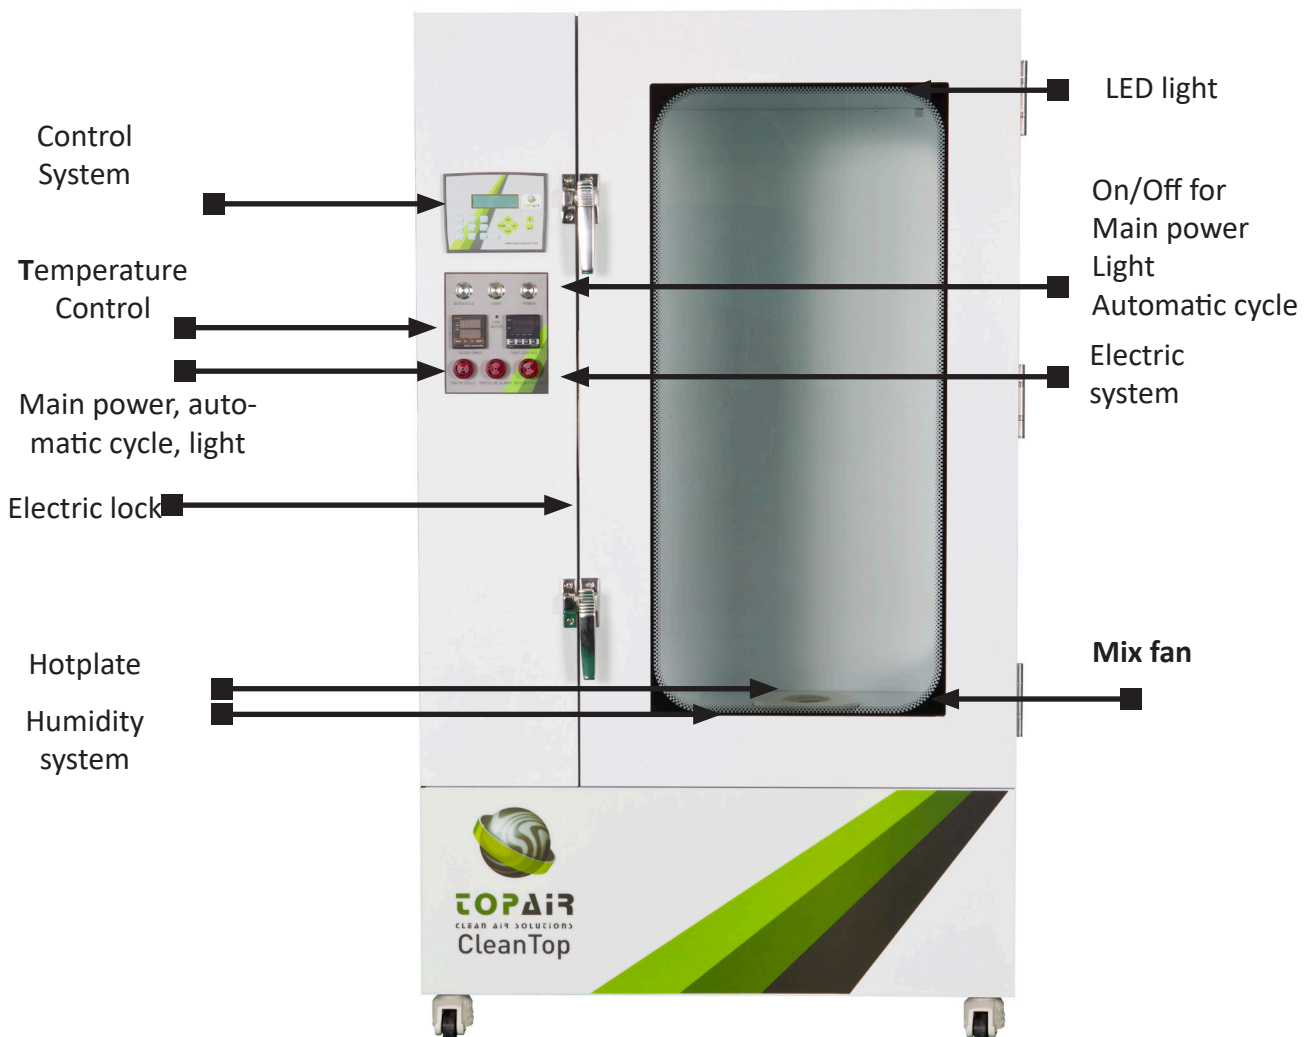


# Models

Spec/Model	SG-060-P	SG-075-P	SG-090-P	SG-150-P	SG-180-P
Airflow (m3/hr)	175	250	250	250	250
Dimensions WxDxH	600 x 600 x 760 mm 23.6 x 23.6 x 29.9"	750 x 750 x 1550 mm 29.5 x 29.5 x 61"	900 x 750 x 1550 mm 35.4 x 29.5 x 61"	1500 x 750 x 1550 mm 59 x 29.5 x 61"	1800 x 750 x 1550 mm 70.8 x 29.5 x 61"
Noise	<48 dBA	<48 dBA	<48 dBA	<48 dBA	<48 dBA
(Tested 20 cm from the work table, 1.2m above ground)					
Lighting	LED 18 W	LED 18 W	LED 18 W	LED 18 W	LED 18 W
Main Filter (Qty.)	3 kg	5 kg	5 kg	8 kg	8 kg
Prefilter (Qty.)	1	1	1	1	1
Power Supply	115 / 230V 50/60 Hz, Single phase				
Switches	Main ON/OFF				
Monitoring	Electronic Display				
Fan	Low Noise Centrifugal				
Construction	Polypropylene Structure, Safety Triplex Glass				
Production/Test Standard	CE				

## Programmable Electronic Control

The electronic control system includes easy on-screen functions to program Purge Cycle, Contact Time and RH Sensor.



Filter Type	P/N
Main Filter	SG-CF
Pre Filter	SG-PF

Main and Pre Filters are supplied as standard with all chambers and are listed here for replacement purposes.

\* Prefilters are supplied as standard with all units. Efficiencies are over 99.6%. The filters remove particles from the airstream before it flows through the Main Filter.

\*\* Filters must be changed on a regular basis to maintain chamber efficiency.

## Operation Process

- Evidence is placed within the chamber and cyanoacrylate is placed on the hotplate.
- Door is closed and start button is pushed. Door locks automatically.
- Evidence is placed within the chamber.
- Humidifier is activated, increases humidity and releases vapors composed of 60%-80% humidity and fumes into the chamber.
- Fuming continues for a half-hour cycle.
- Once the cycle has completed, the evidence can be examined.

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: sales@topairsystems.com

Web: www.topairsystems.com | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA



# Water Filtration Cyanoacrylate Fuming Chamber



**NEW!**

TopAir's Water Filtration Cyanoacrylate Fuming Chamber is used to develop latent prints from non-porous surfaces in a safe, controlled environment.


Cyanoacrylate is placed inside the chamber while evidence is easily positioned using the adjustable hanging rods. Starting the cycle triggers the automated system to control the hotplate, humidity, door lock, internal circulation fan, and purge cycle.

The Cyanoacrylate vapors are filtered using water filtration. This ensures that no dangerous substances are exhausted in to the atmosphere surrounding the laboratory.

The reaction of the fumes of cyanoacrylate to water causes the fumes turn into to non-hazardous plastic residue.

The filtration tank is equipped with a draining tap and a built-in washing/ refilling pipe. Removal of the filtration tank is not required for washing and refilling. The unit's recirculatory design enables the system to operate and setup with no ducting required. Its ductless construction also allows the unit to be easily moved and transported.

- Control system displaying all parameters of the processing cycle.
- Automatic heating control is determined according to the amount of cyanoacrylate placed in the chamber.
- Automatic temperature control Humidity control ensures  $\pm 3\%$  humidity
- Water Filtration
- Eco-friendly, cost-saving LED lighting.
- CE certified

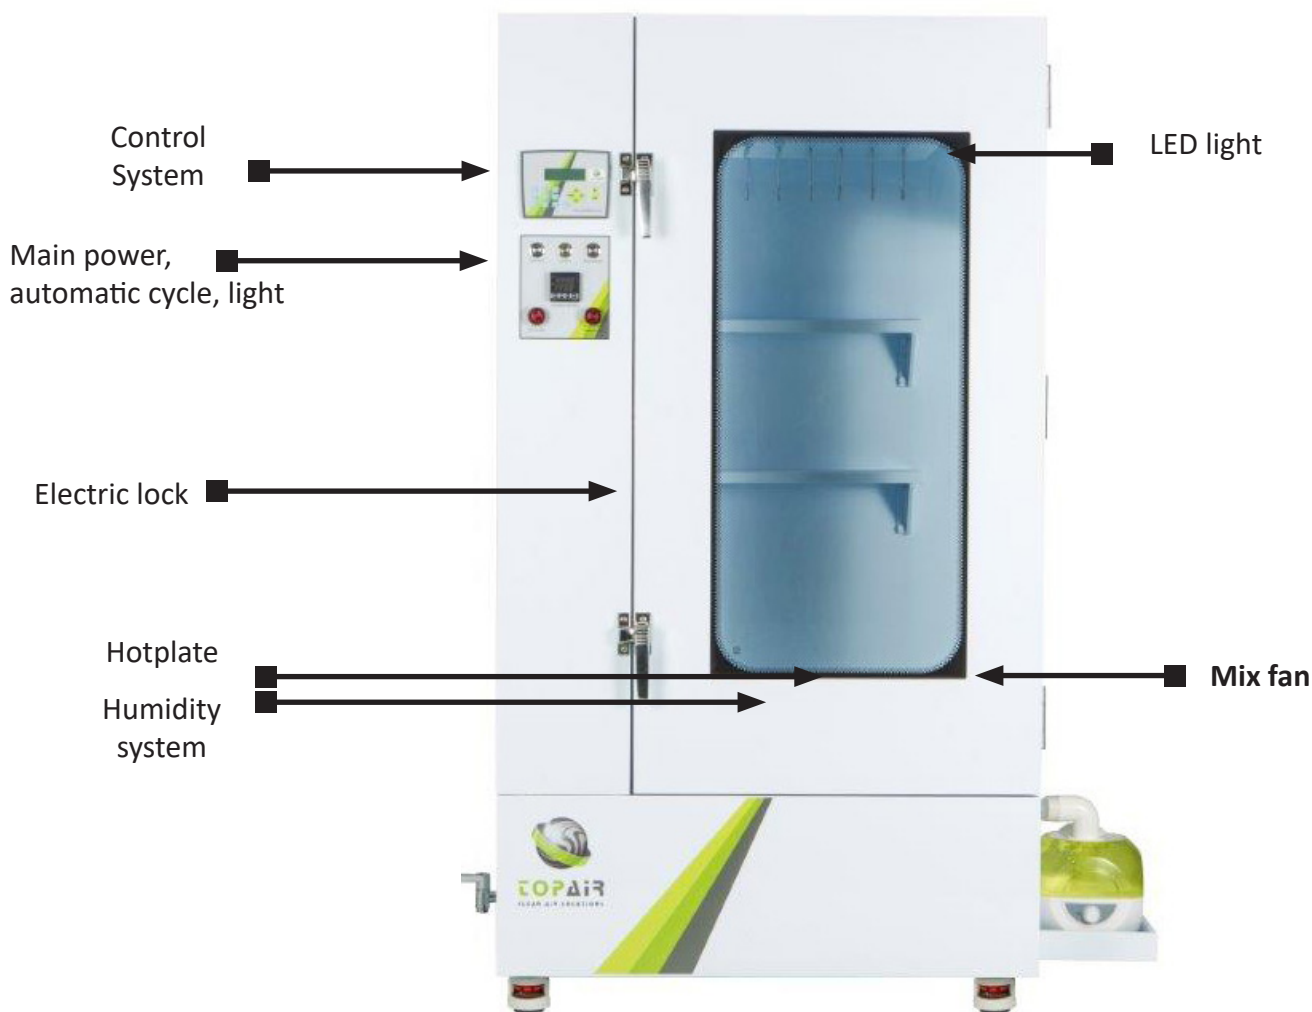

# Models

Spec/Model	SG-060-WF	SG-075-WF	SG-090-WF	SG-150-WF	SG-180-WF
Airflow (m3/hr)	175	250	250	250	250
Dimensions WxDxH	600 x 600 x 760 mm	800 x 750 x 1550 mm	900 x 750 x 1550 mm	1500 x 750 x 1550 mm	1800 x 750 x 1550 mm
	23.6 x 23.6 x 29.9"	31.5 x 29.5 x 61"	35.4 x 29.5 x 61"	59 x 29.5 x 61"	70.8 x 29.5 x 55"
Noise	<48 dBA	<48 dBA	<48 dBA	<48 dBA	<48 dBA
(Tested 20 cm from the work table, 1.2m above ground)					
Lighting	LED 18 W	LED 18 W	LED 18 W	LED 18 W	LED 18 W
Main Filter (Qty.)	Water Trap	Water Trap	Water Trap	Water Trap	Water Trap
Temp & Humidity Accuracy	± 3%	± 3%	± 3%	± 3%	± 3%
Temperature	± 2°C	± 2°C	± 2°C	± 2°C	± 2°C
Fan	High Pressure				--
Power Supply	115 / 230V 50/60 Hz, Single phase				
Switches	Main ON/OFF				
Monitoring	Electronic Display				
Construction	Polypropylene Structure, Safety Triplex Glass				
Production/Test Standard	CE				

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA



# Forensic Evidence Drying Hood



TopAir's advanced Forensic Evidence Drying Hood protects wet or damp evidence from detrimental factors such as potential cross contamination and airborne pathogens.

The hood also creates an effective shield for staff, preventing the operators from being exposed to harmful blood-borne pathogens and harmful bacteria or viruses.

The unit's UV light performs additional disinfection of the Hood's interior between sessions. This prevents cross contamination and ensures the integrity of samples for the purpose of DNA testing.

The unit is designed to clean the incoming air streams through pre-filtration and then filter the Hood exhaust air using HEPA filtration.

TopAir can customize the ductless evidence drying Hoods to meet customer requirements.

- Polypropylene structure with high chemical resistance
- Clear triplex safety glass
- Polypropylene internal & external cover
- Double location HEPA filter – supply and exhaust.
- Internal RH and temperature display
- Top quality purge fan
- UV sterilization + safety interlock mechanism
- Bottom draining basin with tap
- Fast super dry system (SD)
- Electrical - 110/220V, 60/50hz



# Models

Model	EV-090	EV-120	EV-180
External Dimension WxDxH	900 x 1240 x 850 mm 35.4 x 48.8 x 33.4"	1200 x 1240 x 850 mm 47.2 x 48.8 x 33.4"	1800 x 1240 x 850 mm 70.8 x 48.8 x 33.4"
Internal Dimension WxDxH	850 x 1000 x 600 mm 33.4 x 39.3 x 23.6"	1150 x 1000 x 600 mm 45.2 x 39.3 x 23.6"	1750 x 1000 x 600 mm 68.9 x 39.3 x 23.6"
Inner Capacity (L)	510	690	1050
Weight	90	105	135
Power Consumption	100w	100w	100w
Super Dry System	N/A	N/A	N/A
Power Supply	115 / 230V 50/60 Hz, Single phase	115 / 230V 50/60 Hz, Single phase	115 / 230V 50/60 Hz, Single phase
Material	Polypropylene	Polypropylene	Polypropylene
Stainless Steel Shelves	2 pcs loading 100kg/shelf	2 pcs loading 100kg/shelf	

Model	EV-090-SD	EV-120-SD	EV-180-SD
External Dimension WxDxH	900 x 1240 x 850 mm 35.4 x 48.8 x 33.4"	1200 x 1240 x 850 mm 47.2 x 48.8 x 33.4"	1800*1240*850 mm 70.8 x 48.8 x 33.4"
Internal Dimension WxDxH	850 x 1000 x 600 mm 33.4 x 39.3 x 23.6"	1150 x 1000 x 600 mm 45.2 x 39.3 x 23.6"	1750 x 1000 x 600 mm 68.9 x 39.3 x 23.6"
Inner Capacity (L)	510	690	1050
Weight	98	113	143
Power Consumption	900w	900w	900w
Super Dry System	Yes	Yes	Yes
Power Supply	115 / 230V 50/60 Hz, Single phase	115 / 230V 50/60 Hz, Single phase	115 / 230V 50/60 Hz, Single phase
Material	Polypropylene	Polypropylene	Polypropylene

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA



# Downflow Unit



TopAir's Downflow Workstation is a standalone, ductless unit that protects lab staff from harmful powders or fumes.

The Downflow Workstation features an open structure which enables close inspection of various lab materials, and still provides a high level of protection.

Particles or fumes flow downward through the stainless steel work surface and contaminants are removed using several filters.

Following the filtering of fumes or particulates, clean air flows back into the room.



- Polypropylene structure with high chemical resistance
- Electrical - 110/220v, 60/50hz
- Light - 24w LED
- Worktop - 304 SUS
- Filters - H14 HEPA/ carbon
- High efficiency EC fan
- Alarm - High pressure (filter block)
- Welded white polypropylene structure
- Eco-friendly, cost-effective 800 LUX LED lighting
- Convenient front access for filter replacement
- Stainless steel worktop combine with a drawer for easy cleaning
- User-friendly digital control system including fan speed control

# Models

Model	DF-60	DF-90	DF-120
External Dimensions WxDxH	60 x 70 x 120 cm 23.6 x 27.5 x 47.2"	90 x 70 x 120 cm 35 x 27.5 x 47.2"	120 x 70 x 120 cm 47.2 x 27.5 x 47.2"
<b>WE CAN CUSTOMIZE TO ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS</b>			
Internal Height	70 cm / 27.5"	70 cm / 27.5"	70 cm / 27.5"
Power Supply	115 / 230V 50/60 Hz, Single phase	115 / 230V 50/60 Hz, Single phase	115 / 230V 50/60 Hz, Single phase
Light	24w LED	24w LED	24w LED
Worktop	304 SUS	304 SUS	304 SUS
Structure	Polypropylene	Polypropylene	Polypropylene
Filters	H14 HEPA/carbon	H14 HEPA/carbon	H14 HEPA/carbon
Fans	EC fan	EC fan	EC fan

Tel : +1-855-6-TOPAIR (+1-855-686-7247) Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

Web: [www.topairsystems.com](http://www.topairsystems.com) | Headquarters USA: 8912 68th Avenue Forest Hills New York 11375, USA

# TOPAIR CLEAN AIR SOLUTIONS CATALOG



**TOPAIR**  
CLEAN AIR SOLUTIONS

**TopAir Systems**  
**Website: [www.topairsystems.com](http://www.topairsystems.com)**  
**Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)**

**Tel : +1-855-6-TOPAIR (+1-855-686-7247) Fax: +1-718-263-7304**  
**Email: [sales@topairsystems.com](mailto:sales@topairsystems.com) Web: [www.topairsystems.com](http://www.topairsystems.com)**

**Mailing Address:** TopAir Systems, Inc., P.O.Box 754338, Forest Hills, NY 11375 USA

**Headquarters - USA:** 8912 68th Avenue Forest Hills New York 11375 USA

**European Sales Office:** Evolution Testing & Analytical Services (UK) Ltd., Elstree House, Elstree Way, Borehamwood, Herts WD6 1SD, UK, Tel:+44-203-1374012, Email: [sales@topairsystems.com](mailto:sales@topairsystems.com)

All Rights Reserved © TopAir 2019

Distributed By